

The
HIRE SUPPLY COMPANY (UK) LTD.



PRODUCT CATALOGUE

2014-2015



Specialist supplier to the Hire Industry

Welcome to our new catalogue!

At The Hire Supply Company (UK) Ltd, we are committed to providing our customers with a comprehensive product range backed by the highest standards of quality and service.

Our team of qualified professionals are on-hand to provide **instant information and advice.**

We hold vast stocks so you don't have to!

Nationwide

We understand the pressures of seasonal demand and as a result, we offer a **guaranteed next working day delivery service** on all orders received before 5pm.

London

(Within the M25), we offer a 4-6 working hour delivery from receipt of order. With the opening of our second operating base in London - we can deliver the products you need - quicker, and in turn **you will be able to offer a faster delivery to your customers.**

Elite

Every product in the Elite range has been specifically designed for the Hire Industry and been built to withstand the rigours of our industry, **giving you longevity of product and on-going return on your investment.**

Powerman

A select range of electrical contractors equipment packaged in merchandising display box's **ideal for high impact impulse purchases.** Powerman Tools are designed for the professional contractor.

- ★ **Hire Association Europe**
Hire Industry Supplier of the Year - 4 consecutive years
- ★ **Erewhash Partnership - Small Business Award**
Finalist
- ★ **Hire Association Europe - Hire Awards of Excellence**
High Commendation
- ★ **Speedy Services**
Innovation Award 2011
- ★ **Executive Hire Show**
Exhibitor Excellence Award



THE HIRE SUPPLY COMPANY (UK) LTD.

Nationwide: 0845 309 0707 London: 0208 830 8333

www.hscuk.co.uk

Fast Friendly Service • Technical Expertise

Carriage Paid on Orders over £250 (London over £100)


No Minimum Order

Next Day Delivery - Nationwide

(Same Day Delivery - Within M25)

Orders Dispatched up to 5.00pm

HSC 'ONLINE'
ONCE YOU HAVE REGISTERED, OUR ONLINE ORDERING
ALLOWS YOU TO PLACE ORDERS 24 HOURS
A DAY AND YOU WILL BE ABLE TO ACCESS OUR
WEB ONLY SPECIAL OFFERS!
www.hscuk.co.uk

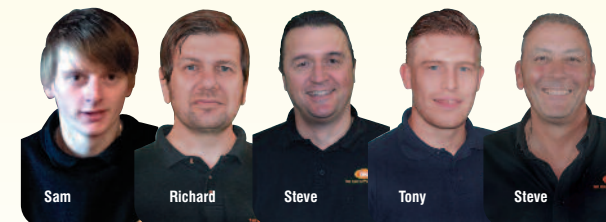

Product Description Pg

Heating/Dehumidifier/Cooling Guides	4
Elite LED Work Lights	5-6
Elite Apollo Fluorescent Work Lights	6
Elite Globe Light/Energy saving Lights	7
Elite Energy Saving Professional Site Lighting	7
R7S24WATT Compact Fluorescent Lamp	7
Elite Professional Site Lighting (Fluorescent)	8
Elite Professional Site Lighting (Tungsten)	9
Powerman Site Lighting	10
Professional Site Lighting (Festoon)	11
EXIN Rechargeable LED Lights	12
Transformers & RCDs	13
Professional Site Electrical Distribution	14
Elite Sky Hooks	14
Elite Industrial & Commercial Electric Heaters	15
Master Electric Fan Heaters	16
Master Direct Diesel Oil Heaters	17-18
Master InDirect Diesel Oil Heaters	18-19
Master Propane Heaters	20
Master Diesel Oil Heaters	21
Master Specialist Heaters	21
Submersible Pumps	22
Master Dehumidifiers/Drying Equipment	23
Master Air Conditioners	24
Master Evaprotive Bio Coolers	24

Product Description Pg

Master Cooling Fans	25
Pownailers	25
Portanailers	25
Professional Gas Equipment	26
Elite Fume Extractors	27
Dustless Technology Vacuums	28
Dustless Technology Extraction Accessories	29-30
Pullman Ermator HEPA Dust Containment	31
Pullman Ermator HEPA Air Scrubbers	32
Elite Dust Suppression Reservoir	32
Elite Wet & Dry Vacuums	33
Drain Rods	33
Decorating Equipment	33
Fire Extinguishers & Accessories	34
Barreto - 9hp Hydraulic Rear Tine Tiller	35
Barreto - 13hp Hydraulic Rear Tine Tiller	35
Barreto - Tracked Trencher	36
GTM Chippers	36
Dosko Root & Stump Grinder	37
Benassi Turf Cutter	38
Benassi Blower Vacuum	38
Benassi Leaf Vacuum	38
Benassi Cultivator	39
Benassi Rotovator	39
Benassi Extreme Mower	39

Product Description Pg

Benassi Flail Mower	40
Benassi Extreme Plus Mower	40
Benassi Large Flail Mower	40
Benassi Scarifier	40
Efco Cultivator	41
Efco Scarifier	41
Efco Mowers	41-42
Efco Hedgetrimmers & Chainsaws	42
Efco Strimmers	43
Efco Strimmer Heads	43
Efco Blowers	43
Garden Accessories/Sprayers	43
Compac Hydraulic & Efco Post Hole Borer	44
Etramo Conveyor Belts	45
Levpano Boardlifters	46
Elite Handling Equipment - Pallet Truck	47
Etramo Handling Equipment - Beam Lifter	47
Gas Storage Cage (Folding)	47
Concrete Dissolver	47
Elite Line Marker Spray Paint	47

Notice. Our product range is expanding at all times. If your requirement is not featured in this catalogue please contact our sales staff, we may stock it. All pictures are for illustration purposes only, products supplied may be different in appearance to products shown. Measurements are approximate. E&OE. All prices exclude carriage and VAT. All prices are correct at time of printing but are subject to change.

LIGHTING

SITE ELECTRICAL & DISTRIBUTION

SITE ELECTRICAL & DISTRIBUTION

PUMPING

DRYING

COOLING

POWER NAILERS

GAS EQUIPMENT

DUST CONTAINMENT

DECORATING

FIRESAFE

GARDEN AND LANDSCAPING

HANDLING EQUIPMENT

MISCELLANEOUS

NEW PRODUCT

LED 10W/20W RECHARGEABLE LIGHT

NEW



See page 5

NEW PRODUCT

APOLLO WORK LIGHT

NEW



See page 6

NEW PRODUCT

LED 10W STANDING LIGHT

NEW



See page 10

NEW PRODUCT

DIRECT DIESEL OIL HEATER

NEW



See page 18

Approximate heating requirements for different building insulation types

Capacity (kW)	New Buildings with average insulation	Old Buildings with average insulation	Greenhouses double glazing	Greenhouses without insulation
TEMPERATURE DIFFERENCE 30°C				
5	70-150 m³	60-110 m³	35 m²	18 m²
10	150-300 m³	130-220 m³	70 m²	37 m²
20	320-600 m³	240-440 m³	140 m²	74 m²
30	650-1000 m³	460-650 m³	210 m²	110 m²
40	1050-1300 m³	650-890 m³	300 m²	150 m²
50	1350-1600 m³	900-1100 m³	370 m²	180 m²
60	1650-2000 m³	1150-1350 m³	440 m²	220 m²
75	2100-2500 m³	1400-1650 m³	550 m²	280 m²
100	2600-3300 m³	1700-2200 m³	740 m²	370 m²
125	3400-4100 m³	2300-2700 m³	920 m²	460 m²
150	4200-5000 m³	2800-3300 m³	1100 m²	550 m²
200	5000-6500 m³	3400-4400 m³	1480 m²	740 m²

Air Conditioning Cooling requirements

A STEP BY STEP GUIDE TO THE COOLING REQUIREMENTS FOR THE AVERAGE OFFICE

Calculate the volume of the area to be cooled in cubic metres, Width x Height x Depth and multiply this volume x 42. (This gives the area requirements in Watts). N.B. If this area size is calculated in cu ft., divide by 35 to give the size in cubic metres.

A) Number of people x 150watt =

B) Number of computers x 200watt =

C) Number of printers x 250watt =

D) Number of fax machines x 150watt =

E) Tea/Coffee machines x 1000watt =

Appropriate Model - Total watts

2.9Kw = 10,000Btu + Room watts

4.1Kw = 14,000Btu

4.6Kw = 16,000Btu Grand Total in watts

This chart should be used as a guide only.

Lumens Chart

Product Description	Wattage	Lumen at 2m	Lamp Life
Tungsten Halogen Lamp	500	9,000	2,000
Elite LED Light	30	2700	30,000
Elite Globe Light	57	3900	6,000
Elite Contractors 2' Light	36	2200	6,000
Elite Plasterers 2' Light	36	2200	6,000
Elite LED Light	35	3100	50,000
Elite LED Light	10	540	30,000
Elite LED Light	20	1080	30,000
Elite Compact Fluorescent Lamp	36	2200	6,000
Elite Compact Fluorescent Lamp	24	2000	6,000
Elite Plasterers 5' Light	58	4950	6,000
Magnum Fluorescent Lamp	72	4400	6,000
Elite Task Light	38	2800	6,000
Elite LED Light	60	5700	50,000
Elite Apollo Fluorescent Light 2055	110	8200	8,000
Elite Apollo Fluorescent Light 4055	220	16400	8,000
Powerman LED Light	30	2100	30,000
Powerman LED Light	20	1400	30,000
Powerman LED Light	10	1000	30,000

Lumen values supplied by the manufacturer, please use this chart as a guide only.

Formula for calculating heating requirements

Basic formula

$$V \times \Delta T \times K = \text{kcal/h}$$

Before choosing your heater you need to determine the minimum power required for your application

Key:

V = Volume of area to be heated (width x length x height) in m³

ΔT = T - Difference between the external temperature and the desired internal temperature (in °C)

K - Dispersion coefficient



V = Width 4mt, Length 12mt, Height 3mt.
Volume of area to be heated = 144 m³



ΔT = External temperature - 5°C
Internal temperature required +18°C
temperature T = 23°C



K = This factor is determined by the type of construction and insulation

Example:

Thermal power required
144 x 23 x 4 = 13 248 kcal/h

$$(V \times \Delta T \times K = \text{kcal/h})$$

1 kW = 860 kcal/h

1 kcal/h = 3.97 Btu/h

1 kW = 3.412 kcal/h

1 kcal/h = 0.252 Btu/h

Now you can choose the heater which best suits your application.

Dehumidifier selection principle

Dehumidifiers can be used in a large number of applications but a dehumidifier has to have appropriate power to fulfil its purpose. Read about ways to select the right dehumidifier and use the efficiency calculator we developed for you.

Formula for calculating recommended air displacement of dehumidifier:

$$V \times 3 = [\text{m}^3/\text{h}]$$

$$(L \times W \times H) \times 3 = \text{m}^3/\text{h}$$

Example:

Accommodation:

Width: 4m

High: 4m

Length: 5m



$$V = 4 \times 4 \times 5 = 80 \text{ m}^3 \quad \text{Recommended dehumidifier's air displacement} = 80 \times 3 = 240 \text{ m}^3$$

The smallest dehumidifier that you can use in that type of a room is DH721 with air displacement of 240 m³/h. Choosing the bigger capacity dehumidifier can shorten the drying process.

Please remember that too quick drying can damage the drying surface,

Heavy duty Aluminium casing designed for industrial applications. Head can be rotated up and down through 160 degrees. Universal ballast allowing them to run from either 110volt or 240volt supply. Only 35watts the energy consumption is extremely low compared to a 500watt tungsten halogen. The LED lights are IP65 rated and have switches on the back off the light so that they can be turned on and off when required and are not constantly on when plugged in. The spread of light from the Elite Led is 120 degrees making it ideal for open and enclosed applications.

1 Elite 35w LED Mini Pod

Heavy duty one piece steel powder coated frame. Soft grip handle. Wired with 5mtr cable and fitted 16amp 110v plug.

Product Code: MP-LED06249



After the lights have been switched off they can be handled almost immediately with no risk of burning.



2 Elite 35w LED Light Head (Prewired)

Heavy duty Aluminium casing. Universal ballast allowing them to run from either 110volt or 240volt supply. Wired with 5m 1.5mm cable and a fitted 16amp 110v plug. Switchable on/off.

Product Code: LEDH05899



3 Elite 35w LED Swing Leg Tripod Light

Heavy duty steel tripod, extendible from 1.5m - 2.4mtr. Wired with 5m 1.5mm cable and a fitted 16amp 110v plug.

Product Code: STLP-LED06999




ELITE LED WORK LIGHTS

4 Elite 35w LED Tri Head Area Light

Designed for both internal and external illumination, the LED Area work light has 3 powerful 35watt COB LEDs positioned on top of a 3mtr high heavy duty triangle shaped bracket for whole area illumination. The heads have a universal ballast allowing them to run from 110volt or 240volt power supplies and with a total draw of just 105watts its hugely energy saving.

Product Code: TRI-LED029900

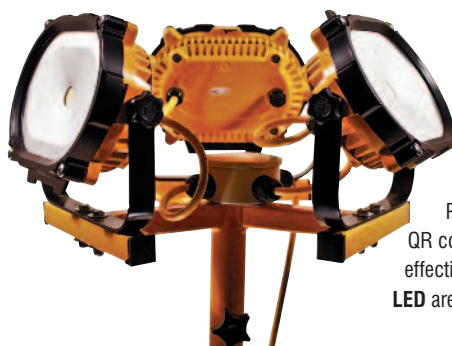

Please scan this QR code, to see how effective the Tri Head LED area light really is.



5 LED Rechargeable Light

LED 10W

Light Source: Epistar LED. Working Voltage: AC84-265V. Power: 5W/10W. Power Source: Li-Battery (4400mAh). Lumens: >540Lm. Fixture Efficiency: >90%. Emitting Color: White (3000-6000K). Life Time: 30000 Hours. Viewing Angle: 120°. Charging Time: 5 Hours. Working Time: 3-5 Hours. 240volt Mains Charger. Car Charger. Weight 1.35kg. Size: H240 x W145 x D165mm.

Product Code: LED10WR02999



Magnetic Base

LED 20W

Light Source: Epistar LED. Working Voltage: AC84-265V. Power: 10W/20W. Power Source: Li-Battery (4400mAh). Lumens: >1080Lm. Fixture Efficiency: >90%. Emitting Color: White (3000-6000K). Life Time: 30000 Hours. Viewing Angle: 120°. Charging Time: 5 Hours. Working Time: 3-6 Hours. Weight 1.8kg. 240volt Mains Charger. Car Charger. Size: H265 x W215 x D185mm. Product Code: LED20WR04199



6 Elite LED 30w

LED light head complete with 5mtr cable & 16amp 110volt plug. A direct alternative to tungsten halogen giving a clean white light. AC85-265V 50Hz 2700 Lumens. 6400K Epistar 30,000hrs. LED 120° light spread. 5mtr H05 RN-F cable & fitted 16amp plug IP44. Robust aluminum alloy light head. Weight: 1.6kgs.

Tripod Light Product Code: LED30WSLTP03995

MiniPod Light Product Code: LED30WMP03295

Head Prewired Product Code: LED30W5MARC02849

Head Only Product Code: LED30WHEAD02249



NEW



ELITE LED WORK LIGHTS

ELITE APOLLO FLUORESCENT WORK LIGHTS

1 Elite LED Double Head Work Light c/w 2pto

This new LED work light with 2 x 30watt LEDs produces a similar output to a 500watt tungsten halogen lamp, but using just 10% of the power draw. Fixed on to a robust retractable frame with a carrying handle makes moving this light easy around site. The LED light heads can be rotated forwards and backwards to help spread the impressive 120 degree light output. Coupled with 2 power take off sockets and 5mtrs of power cable makes this LED light just about the most versatile LED on the market.

Product Code: 30WRDLHLED09900



2 Elite LED 60w

Floor standing work light.
Heavy duty steel frame.
Wired & plugged 110volt with a 16amp plug.
Power Input AC85-260volt 50Hz.
5700Lumens - 6400K.
Epistar LED 50,000hrs life.
120° light spread. Aluminum Alloy head and toughened glass.
5mtr HO5 RN-F cable & fitted 16amp plug IP44. Weight: 4.4kgs.

Product Code: LED60W1106999



3 Elite Apollo 2055 & 4055 Work Lights

Fluorescent work light.

Designed for whole room illumination, walk way lighting, plastering and general applications where a good clean light is required. Can be placed on the floor with its tripod or hung from the ceiling.

- 110volt 50Hz.
- 8200 Lumens/16400 Lumens
- 6400K (daylight tubes).
- 2 x 55watt/4 x 55watt Fluorescent U Lamps.
- 8000hrs lamp life.
- 1 x Link Socket.
- 5mtr HO5 RN-F cable and fitted 16amp plug.
- IP44.
- Weight: 4.5kgs/6.4kgs

Dimensions:

Apollo 4055 With tripod

H x 1070mm Stance x 1000mm

Apollo 4055 Tripod Compacted

H x 740 W x 320 D x 300mm

Product Code: A4055FL11007299



Dimensions:

Apollo 2055 With tripod

H x 1035mm Stance x 940mm

Apollo 2055 Tripod Compacted

H x 740 W x 240 D x 220mm

Product Code:

A2055FL11003999



Apollo 4055



ELITE PROFESSIONAL ENERGY SAVING SITE LIGHTING



1 Globe Light 57watt 110v & 240v

The Elite Globe Light provides a glare free Omni-directional clean white light for a multitude of applications. The diffuser is virtually indestructible and each light has a hook on the base for suspending from a ceiling. They can be tripod mounted with the optional tripod mounting accessory or simply placed on the floor.

Each light can be linked together via the panel socket and you can link up to 25 lights from a 3.3kva transformer. **It is recommended that 1 in 3 Globe lights linked together is a battery back-up light to allow for safe evacuation should the power supply fail.** The lamp is a 57watt compact fluorescent tube which helps to eliminate shadows. It gives off virtually no heat so is suited to working in confined spaces such as attics and basements.

The ELITE GLOBE LIGHT comes complete with 5mtr of 1.5mm cable and a fitted plug, either 110volt 16amp or 240volt 13amp, the Globe light will provide sufficient light for plastering, general work space illumination or confined space works.



Battery back version available

Elite 57watt High Efficiency Lighting

SPECIFICATIONS
 Rated Voltage: 110volt or 240volt
 Electronic Ballast: (PF) 0.98
 Frequency: 50Hz
 Power (CFL): 57watt
 Lamp Holder: GX24
 Protective Level: (Diffuser) IP54
 (Panel Socket) IP44
 Cable 1.5mm: x 5mtr
Product Code: 110V GL1103499
 240V GL2403499

GL110BBU BATTERY BACK UP
 Rated Voltage: 110volt
 Electronic Ballast: (PF) 0.98
 Lithium Battery: 11.1volt , 1500MA
 Battery duration: Min 1hr at 25% light output
 Power (CFL): 57watt
 Lamp Holder: GX24
 Protective Level: (Panel Socket) IP44
 Cable 1.5mm: x 5mtr
 Plug: 110v 16amp
Product Code: GL1105999


2 36watt Retractable Leg E-Lite c/w 2 pto sockets

Heavy duty brackets & wire guard.
 Heavy duty retractable leg tripod.
 Powder coated frame.
 Extendible from 1.2m to 2.2m
 dual height securing screws.

Product Code: Double Head 115V
 36WRDH110PT003905



Set-up details Electrical safety test label



Strengthening plate



REPLACEMENT LAMP
Product Code: 36WT00199

3 36watt Extending Swing Leg Tripod Lights

Heavy duty brackets and wire guard. Heavy duty steel tripod. Extendible from 1.5m - 2.4m. Wired with 5m 1.0mm cable and fitted plug. Available in 115 volt. Also available as replacement heads pre-wired and unwired.

Product Code: Tripod Light 110V 36WSLTP11001795
Product Code: Head pre-wired 110V 36WH5MARC0995
Product Code: Head only 110V 36WHEAD1100755

Elite 36watt High Efficiency Lighting



4 36watt Mini Pod Floor Standing light

Heavy duty brackets & wire guard. Heavy duty one piece steel frame, powder coated. Soft grip handle. Wired with 3m 1.0mm cable and fitted plug. Available in 115 volt or 230 volt.

Product Code: 115V 36WMP1101195
 230V 36WMP2301195

Elite 36watt High Efficiency Lighting



5 36watt Magnetic Site Light

2 x heavy duty magnets on a steel powder coated frame, c/w 1.0m cable, plug and lamp.

Product Code:
 115V 36WML11001895
 230V 36WML23001895

6 R7S24Watt

Swap your 500watt Tungsten Halogen Lamps for 24watt Compact Fluorescent Lamps.

The new 24watt CFL lamp is the next step in reducing energy costs for portable illumination on site.



Hsc's new 24watt Compact Fluorescent lamp has been designed to fit both Square and Oval tungsten halogen heads. It is also supplied with a sprung metal support that's helps to keep the lamp in place during transit.

- 24watt compared to 500watt
- Available in 110v and 240v
- Extremely low heat output compared to tungsten halogen
- Clean white light compared to a harsh yellow light

Product Code: 110V R7S24W1100399
 240V R7S24W2400399





ELITE PROFESSIONAL FLUORESCENT SITE LIGHTING

Fluorescent - IP44 Rated

1 5' Magnetic Light

3m cable input and plug. 3m cable output and coupler c/w three heavy duty magnets. **Product Code: MAGFL04450**



Battery backup option available.
Product Code: 5FMLBBU07350

2' & 5' wired and unwired fittings available. P.O.A.

2 2' Magnetic Light

3m cable input and plug. 3m cable output and coupler. Mag light c/w two heavy duty magnets.

Product Code: MAGFL204250

Battery backup option available.

Product : 2FMLBBU06590



• Ideal for overhead lighting

3 2' Battery Back Up Fluorescent Light

2' fitting with 2 x 18watt lamp. IP65 rated fitting, Polycarbonate diffuser. 5m cable and 16amp plug. Retractable leg tripod. 2 Power Take Off sockets.

Product Code: PL2BBU07500

Battery is charged whilst unit is connected to power supply. When power supply is cut unit runs at a diminished light output from one tube for approximately 3 hours. (Depending on charge time).

4 5' Battery Back Up Fluorescent Light

5' fitting with 2 x 18watt lamp. IP65 rated fitting, Polycarbonate diffuser. 5m cable and 16amp plug. Retractable leg tripod. 2 Power Take Off sockets.

Product Code: PL5BBU07900



5 72watt Contractor/Scaffold Light



1 power input socket.
1 power take off socket.
2 x 36 watt tubes.
Link up to 14 units*.
H300mm x W550 x D255mm.
Weight 5kg.

Product Code: MAG11506995



Accessories:

Scaffold Bracket
Trackside Bracket
Replacement lamp

* Dependant on power supply

Product Code: MSB00595

Product Code: MTB00995

Product Code: MAGTUBE00415

6 Retractable Leg Plasterers Light

The new easy store plasterers light designed to free up valuable floor space and ease transport problems, c/w 2 Power Take Off sockets.

5' **Product Code: PL5RPT003995**

2' **Product Code: PL2RPT003895**

ROBUST RETRACTABLE LEGS ALLOW THIS NEW PLASTERERS LIGHT TO BE TRANSPORTED AND STORED EASILY.

***Supplied boxed**



7 3m 72watt Roadside Trackside Light

2 x 36watt tubes. 5800 Lumens. 14m cable.
Product Code: SLLM09995 (Link 14)

Originally designed for railtrack use these units are well adapted for a multitude of applications

8 3m Roadside/Trackside Light

2 x 18watt tubes. 2700 Lumens.
14m cable.


Product Code: SLL06995 (Link 40)

Folding Basket Tray

Product Code: LLB01795

Ground Spike

Product Code: GS00995

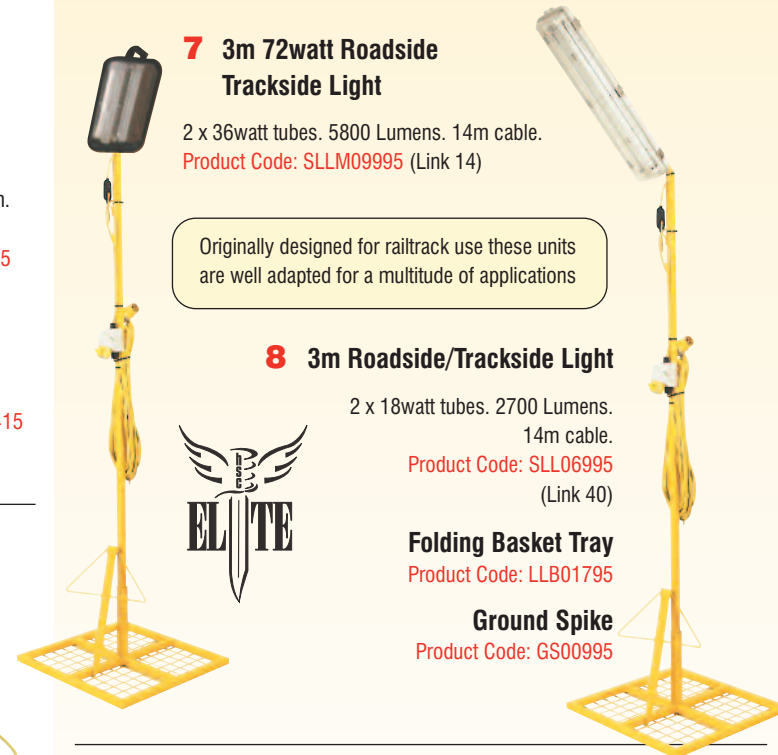

9 2' Contractors Fluorescent Light

c/w 2 power take off sockets.
2' x 18watt tubes.

2700 Lumens.
5m cable and plug

Product Code: CL115PT002695

*** Supplied built, ready to go.**

2' & 5' wired and unwired fittings available. P.O.A.




ELITE PROFESSIONAL TUNGSTEN HALOGEN SITE LIGHTING

1 Extending Swing Leg Tripod Lights

500watt oval tungsten halogen fittings. Strengthened brackets & wire guard. Robust BZP steel tripod. Extendible from 1.5m - 2.4m. Wired with 5m 1.5mm cable and fitted plug. Available in 115 volt or 230 volt. **Free 500watt lamps.**

Product Code:

Double Head 115V **SLDH11501995** Single Head 115V **SLTP11501495**
230V **SLDH23001995** 230V **SLTP23001495**




All 500 watt Tungsten Lights are supplied with free of charge lamp

2 500watt & 1000watt Tungsten Halogen Heads

(IP54 Rated) c/w Free 500watt lamp and wire guard.

Product Code:

500w 115V/230V **THH00495**
1000w 115V/230V **THH1T001200**




3 Tungsten Halogen Heads Prewired

c/w 5m cable, plug, Free 500watt lamp and wire guard.


Product Code:

115V **THH5MARC00799**
230V **THH5M23000799**



4 Mini Pod Floor Standing light

1 x 500watt oval tungsten halogen fitting. Strengthened brackets & wire guard. Heavy duty one piece steel frame, powder coated. Soft grip handle. Wired with 3m 1.5mm cable and fitted plug.



Free 500watt lamp.
Available in 115 volt or 230 volt.

Product Code: 115V **MP1150925**
230V **MP2400925**




5 Magnetic Site Light

500W c/w 5m cable, plug and Free 500watt lamp.

Product Code:

115V **ML11501525**
230V **ML23001525**

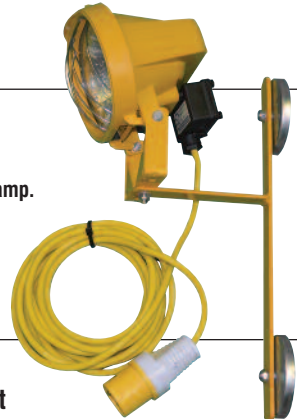


6 Double Head Magnetic Site Light

2 x 500W c/w 5m cable, plug and Free 500watt lamp.

Product Code:

115V **MLDH11502850**
230V **MLDH23002850**



7 5 mtr Mast Light

5mtr Mast Light 115volt (4 x 500watt Tungsten Halogen Lights)

Manufactured from mild steel with a folding leg base of 3mtr diameter. Manual lift with individual lock out sections, three different height settings 2.4m, 3.5m & 5m. Heads can be rotated to achieve maximum light coverage.

- 4 x 500watt Tungsten halogen heads
- 10mtr of 2.5mm 3core power cable
- Fitted 32amp plug

Product Code: **5MML12900**




Optional Carrying Bag for frame

Product code **5MMLB01295**

8 Tungsten Halogen Lamps

Product Code:

300W
115V **THL3HW11500039**
230V **THL3HW23000039**
500W
115V **THL5HW11500039**
230V **THL5HW23000039**
1000W
115V **THL1TW11500089**
230V **THL1TW23000089**
Boxed in 50s

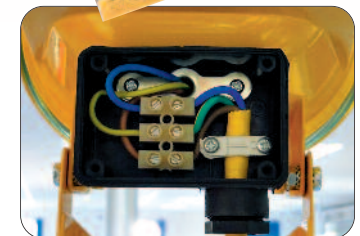

Strengthened back boxes on all new Tungsten Heads



POWERMAN LIGHTING & ELECTRICAL EQUIPMENT

Powerman Tools - designed for re-sale

1 Mini Pod Floor Standing Light 110 volt

1 x 500watt oval tungsten halogen fitting with wire guard. Two piece steel powder coated frame. Soft grip handle. Wired with 3m 1.5mm cable and fitted plug. **Free 500watt lamp.**

Product Code: 115V PMMP1150715



Boxed in 8's

2 Mini Pod Floor Standing Light 240 volt

1 x 500watt oval tungsten halogen fitting with wire guard. Two piece steel powder coated frame. Soft grip handle. Wired with 3m 1.5mm cable and fitted plug. **Free 500watt lamp.**

Product Code: 230V PMMP240715



Boxed in 8's

3 LED 20watt Floor Standing Light

LED Mini Pod work light. Steel frame, Wired & plugged with a 110volt 16amp plug. Power input 110volt 50Hz. 1400Lumens, 6400K Epistar LED 30,000hrs. 120° light spread. 3mtr HO5 RN-F cable & fitted 16amp plug. Aluminium alloy head and toughened glass. IP44. Weight 1.8kg. **Product Code: PMGL24202699**



4 LED 30watt Floor Standing Light

LED Mini Pod work light. Steel frame, Wired & plugged with a 110volt 16amp plug. Power input 110volt 50Hz. 2100Lumens, 6400K Epistar LED. 30,000hrs. 120° light spread. 3mtr HO5 RN-F cable & fitted 16amp plug. Aluminium alloy head and toughened glass. IP44. Weight 2.8kg. **Product Code: PMGL23303399**



Wide base feet for better stability

Boxed in 4's

5 2' Contractors Fluorescent Light

c/w 1 Power Take Off socket. 2' x 18watt tubes. 2700 Lumens. 5m cable and plug.

Product Code: 115V PMCL11002499

*Supplied built, ready to go.



6 10watt Rechargeable LED Bug Light

240volt/110volt 50Hz. 1000Lumens - 6400K. 2 x 5watt CREE LEDs, 30,000hrs. Work Time Full Power 3.5hrs/5hrs half power. Recharge time 3hrs. Telescopic tripod up to 1.6m. Retracted: H x 745mm W x 120mm D x 120mm. Extended: H x 1820mm Base W x 690mm Base D x 690mm

Product Code: PMLED10WBLR6999



7 Extending Folding Leg Tripod Lights

500watt oval tungsten halogen fittings with wire guard and powder coated folding steel tripod. Extendible from 1.1m - 2.1m. Wired with 5m 1.5mm cable and fitted plug. Available in 115 volt or 230 volt. **Free 500watt lamp.**

Product Code:

Double Head


115V PMFLDH11501795

230V PMFLDH12401795

Single Head

115V PMFLTP1151299

230V PMFLTP2401299



Boxed in 4's



POWERMAN TOOLS ARE BOXED IN RETAIL DISPLAY PACKAGING, IDEAL FOR TRADE COUNTER DISPLAYS.

ELITE PROFESSIONAL SITE LIGHTING

1 Festoon Kit

22m of 2.5mm cable. Electrically moulded ES fittings. IP44 rating. 10 bulbs, 10 guards, and 16 amp 110v plug.

Product Code: FSESKIT02695


*B/C kits available upon request.



2 ENERGY SAVING Festoon Kit

22m of 2.5mm cable. Electrically moulded ES fittings. 10 x 13watt CFL bulbs, 10 guards, and a 16amp 110v plug.

Product Code: FSESKITLW03695

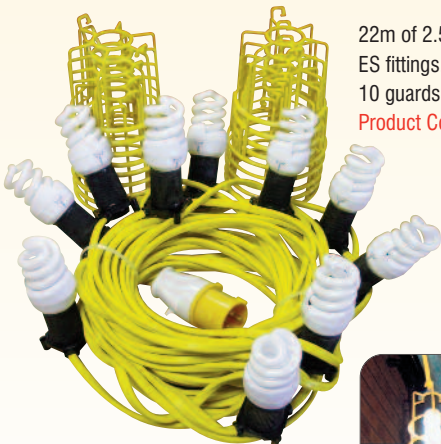

4.5 times more energy efficient compared to GLS

REPLACEMENT LAMP (Spiral)

Product Code: CFLS00149



GLS

ENERGY SAVING

10 x 60w = 600watt	-	10 x 13watt = 130watt
20 x 60w = 1,200watt	-	20 x 13watt = 260watt
33 x 60w = 1,980watt	-	33 x 13watt = 429watt

ALSO AVAILABLE:

10mtr kits with 2 lamp holders 5mtr apart Energy Saving lamps, plug and coupler Product Code FS10ENC01499

3 Festoon Lighting

100m x 3m spacing electrically moulded fittings in Edison screw or Bayonet cap.

Maximum bulb wattage 60watt. IP44 rating.

Product Code: FS3MES06999 FS3MBC06999


100m x 5m spacing electrically moulded fittings in Edison screw or Bayonet cap. IP44 rating.

Product Code: FS5MES06378 FS5MBC06379



4 Festoon Guard

Product Code: FG00099




Product Code: FGE00199 (Enclosed)



5 Festoon Bulbs Industrial Use

GLS Bulbs available in 110 or 240v, 60watt and 40watt, ES or BC fitting.

Product Code: FB00025



6 Photocell Energy Saving Festoon Bulbs (Bulbs that turn themselves on/off)

Day/night sensor. 15w bulb equivalent to 75w incandescent bulb. 80% Energy saving. 110v50Hz. 6400k daylight bulb. 8000 hours life. E27 fitting. Product Code: FBESPC0299



7 Gripper Inspection Light

110v or 230v (Glass Shroud)

3mtr of cable and fitted plug. Bayonet bulb fitting (Max. 60watt).

110V Product Code: EGL110P01095

230V Product Code: EGL240P01095

Festoon Lighting

8 Gripper Inspection Light

110v or 230v (Plastic Shroud)

3mtr of cable and fitted plug.

Bayonet bulb fitting (Max. 60watt).

110V Product Code: EGL11501095

230V Product Code: EGL24001095



9 Task Light 38watt 110v or 230v

Portable work light, ideal for use in confined spaces

(it never gets hot), lightweight with a purpose designed carrying handle.

W240mm x D120mm x H320mm.

38watt 2D lamp. 3mtr of cable and fitted plug. IP44 rated.

Product Code: TL11001299

Product Code: TL24001299

Replacement Lamps

Product Code: TL115L0319 Product Code: TL240L0319



10 LED Extendable Torch

The Elite LED Extendable work

light can be used in various

environments. The magnetic base

allows hands free use and it can be used as a

spot beam torch using the 6 LEDs or as a general

purpose light via the 30 LED's on the telescopic side panel.

• 80 lumens • Rechargeable Ni-MH Battery • 3 light modes

• Magnetic base • Mains and car charger • Run time 4hrs

• Charge time 6hrs • Battery 3.6V 1000Mah NI-CAD

• Heavy duty rubber casing - oil and water resistant.

• Weight 297grams • Supplied in box's of 12 Product Code: LEDT01099





EXIN LIGHT
Ex & Industrial Lighting

LED RECHARGEABLE BATTERY WORK LIGHTS

PORTABLE LIGHTING SYSTEMS Industrial, Explosion Proof **Ex** and Recreational Models

1 TM120L & TM120LB



Single Side

2 IN120L & IN120LB



Double Sided

3 IN2400L



IP65

4 EX90L T4

Ex IECEx Zone 0 Group 1
Group IIa T2 IP65




5 TRAVELLER



Single Side

ACCESSORIES

The underside of the EXIN is unique and is designed to attach to a range of industry standard equipment including: tripods, scaffolding, cross beams, walls, elevated work platforms and special purpose applications.



Product Code: SI-TRL-RGA-3



Lens Clips for retro fitting older units
Product Code: SI-INEX-CLIPS-1



MODEL	WEIGHT	RUN ON ONE LED HEAD	RUN ON BOTH LED HEADS	OPEN HEIGHT (mm)	CLOSED HEIGHT (mm)	WIDTH (mm)	LUMENS	LIGHT TYPE	DEPTH (mm)	VOLTAGE (AC/DC)
TM120L21500	8.3kg	12 hours	N/A	1100	600	334	1030LM	2-stage LED	220	230-240v & 12v
TM120LB24400	11kg	30 hours	N/A	1100	600	334	1030LM	2-stage LED	220	230-240v & 12v
IN120L28900	8.1kg	12 hours	6 hours	1120	580	340	2060LM	2-stage LED	250	230-240v & 12v
IN120LB31900	11.1kg	30 hours	15 hours	1120	580	340	2060LM	2-stage LED	250	230-240v & 12v
IN2400L44500	12kg	48 hours	N/A	1120	580	340	2450LM 1 side	2-stage LED	250	230-240v & 12v
EX90LT2 (720)64900	7.6kg	12 hours	6 hours	875	575	340	1440LM 1 side	1-stage LED	200	110-240v
EX90LT2 (1440)69900	7.7kg	6 hours	N/A	875	575	340	1440LM 1 side	1-stage LED	200	110-240v
EX90L T4 (720)59900	7.5kg	12 hours	N/A	875	575	340	720LM 1 side	1-stage LED	200	230-240v
TRAVELLER14400	5.3kg	11-12 hours	N/A	670	450	270	720LM 1 side	2-stage LED	150	110-240v & 12/24v



Optional Back Pack for IN and EX models
Product Code: SI-BP102089



Optional Traveller Back Pack
Product Code: SI-BP201895



SL-TP70 Tripod Attachment



SL-SSP Stabilising & Security Plate

Please remember to fully charge your EXIN LIGHT at least once every 2 months




Product Code: SI-INEX-RGA-3



Product Code: SI-INEX-EXIT-LR



Product Code: SI-INEX-STOP-2



Product Code: SI-IN24-OPAL-2

ELITE TRANSFORMERS & RCD'S



1 10kva Site Transformers

Manufactured to comply with BS4363: 1998 to provide a 110 volt reduced low voltage supply to BS7671 standard.

10KVA Single phase
4 x 16 2 x 32 amp.


Product Code:
Single Phase
T10KVA1P33562

10KVA Three phase
415V 4 x 16
2 x 32 amp.

Product Code:
Three Phase
T10KVA3P46754



2 RCD Protection

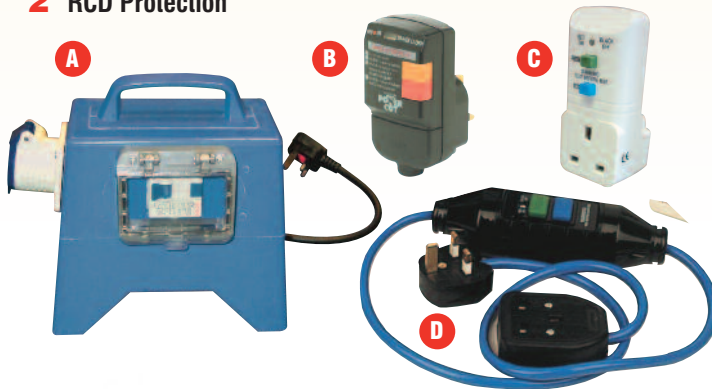

A RCD16 230V 16 amp. BS4343 socket.

B RCDP13 amp RCD plug.

C RCDA Safety point adaptor.

D RCDA inline safety point c/w cable & plug.

Product Code: RCD1603695

Product Code: RCDP00995

Product Code: RCDA00950

Product Code: RCDI02195

3 Power Tool Rated Transformers

1.5KVA 2 x 16 amp.

Product Code: T1.5KVA2x160203495

3.3KVA 2 x 16 amp.

Product Code: T3KVA2x1603995

5KVA 2 x 16 amp

1 x 32 amp.

Product Code: T5KVA2x161x32010900



Glass fibre box,
resin filled.

5 3kva Step Up Transformer

3.3KVA portable tool rated transformer. GRP case to IP44. 3300VA Intermittent duty cycle. 1650VA continuous rated transformer. Input 110 volts 1-PH @50/60Hz. Output 230 volts@13 amps. 2 x 230volt 16 amp 2P+E IP44 rated to IEC 60309. Weight: 16.5Kg. H257mm x L 210mm x W237mm.

Product Code: T3KVASU06500



4 Vented Heater Transformer

3kva continuous rated.

1 x 32 amp outlet.

Specially designed for use with 110 Volt heaters.

Vented body to allow air flow.

Product Code: T5KVAMV15900



6 5.0KVA Continuous Rated Isolating Transformer

Input: 230 volts 1-PH @ 50/60Hz.

Output: 110 volts C.T.E @ 45 amps. Insulation class B.

Sockets: 1 x 110 volt 16 amp + 1 x 110 volt 32 amp 2P+E IP44 rated to IEC60309. Protection: Manually resettable 20 amp thermal MCB on input, transformer is potted in sand and sealed with resin for additional cooling.

Input Cable: 2mtr 2.5mm² 3 core arctic blue (plug not supplied)

Dimensions: H275mm x L315mm xW345mm

Weight: 46Kg. Product Code: T5KVAC027900

1 Extension Reels

20metres x 1.25mm cable 13amp 240volt

Product code: EXR20M24001649

25metres x 1.5mm cable 13amp 240volt

Product code: EXR25M24001895

25metres x 2.5mm cable 13amp 240volt

Product code: EXR25M2402.502895

50metres x 1.5mm cable 13amp 240volt

Product code: EXR50M24003150

25metres x 1.5mm cable 16amp 110volt

Product code: EXR25M11001995

25metres x 2.5mm cable 16amp 110volt

Product code: EXR25M1102.503195



50metres x 1.5mm cable
16amp 110volt

Product code:
EXR50M11003295

2 Extension Leads

240 Volt 1.5mm x 14m 16A

Product code EXL1424016

240 Volt 2.5mm x 14m 16A

Product code EXL142402.516

110 Volt 1.5mm x 14m

Product Code: EXL14M110

110 Volt 2.5mm x 14m Product Code: EXL14

Prices are subject to change. P.O.A.

240 Volt 1.5mm x 14m 1 GANG. Product Code: EXL142301G

240 Volt 1.5mm x 14m 2 GANG. Product Code: EXL142302G

110 Volt 2.5mm x 14m 32 AMP. Product Code: EXL1432A

110 Volt 4.0mm x 14m 32 AMP. Product Code: EXL1432A4



3 3 Core Cable

1.5mm x 100m drum 110V/240V.

Product Code: AC1.5115


Product Code: AC1.5230

2.5mm x 100m drum 110V/240V.

Product Code: AC2.5115

Product Code: AC2.5230

Prices are subject to change. P.O.A.



4 H07RNF Black Rubber Cable x 100m

1mm 2 Core Product Code: H07102C05820

1mm 3 Core Product Code: H07103C08900

1.5mm 2 Core Product Code: H07152C06995

1.5mm 3 Core Product Code: H07153C08900

2.5mm 2 Core Product Code: H07252C09900

2.5mm 3 Core Product Code: H07253C013500

4.0mm 3 Core Product Code: H07403C18900



Prices are subject to change. P.O.A.

5 Fly Leads

A FL13 13 amp plug - 16 amp coupler, fly lead.


Product Code: FL1300299

B FL16 16 amp plug - 13 amp socket, fly lead.

Product Code: FL1600299

FL16 2G 16 amp plug - 2 x 13 amp socket, fly lead.


Product Code: FL162G00450




6 Electrical Adaptors

3 way 110volt electrical adaptor, easily split your power 3 ways, simply plug in and use.

Product Code: 3WAD11001195



7 Plugs and Couplers

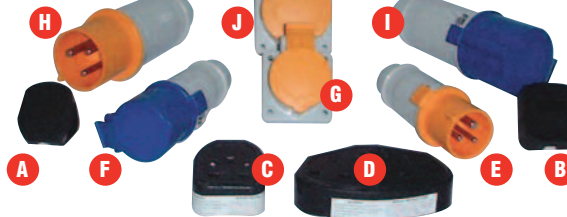

A 13 amp black plug astra approved.

Product Code: 13AP00085

B 13 amp black rubber plug 'PERMA'.

Product Code: 13APR00149

C 13 amp 1 gang black rubber adaptor.

Product Code: 1GADP000220

D 13 amp 2 gang black rubber adaptor.

Product Code: 2GADP000395

E 16 amp 110/240V IEC60309 plug.

Product Code: 16AP115/2300098

F 16 amp 110/240V IEC60309 coupler.

Product Code: 16AC115/23000148

G 16 amp 110/240V IEC60309 panel socket.

Product Code: 16APS115/23000185

H 32 amp 110/240V IEC60309 plug.

Product Code: P32A115/23000385

I 32 amp 110/240V IEC60309 coupler.

Product Code: SKT32A115/23000499


J 32 amp 110/240V IEC60309 panel socket.

Product Code: PS32AP115/23000599

8 6 Way Splitter box c/w MCB

4 x 16amp 110v outlet sockets. 2 x 32amp 110v outlet sockets. MCB protection c/w 5m of 4mm cable and fitted 32amp 110v plug.

Product Code: 6WSBMCB009500

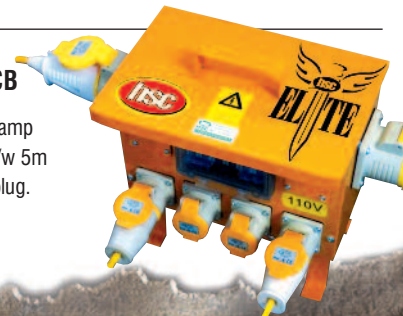

9 4 Way Splitter box 32amp

4 x 32amp 110v outlet sockets.


MCB protection c/w 5m of 4mm cable and fitted 32amp 110v plug.

H355mm x W350 x D255mm.

Weight 6.5kg.

Product Code:

4WSB32AMCB0108500

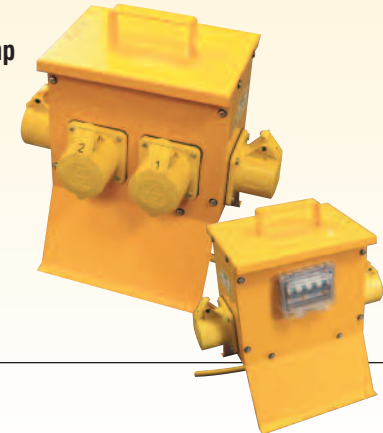

10 4 Way Splitter box

4 x 16amp outlet sockets. 5m of 2.5 mm cable c/w BS4343 16amp plug.


H240mm x W175 x D255mm.

Weight 3kg.

Product Code: 4WSB2.501579

Available with a 32amp 110volt plug with 4 x 16amp outlets -

Product Code: 4WSB2.532P01850

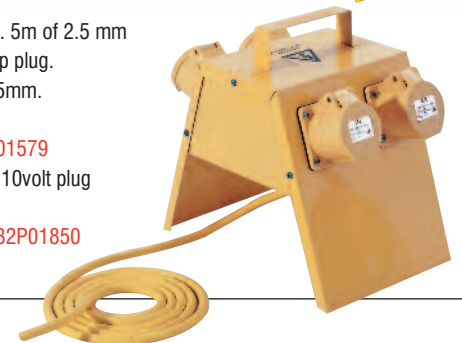


11 SKY Hook

The Elite Cable Sky Hook simply elevates cables safely and securely from floor level and will help to reduce worksite cable trip hazards, preserve cable life and improve worksite efficiency.

Product Code: Pack of 5 SH500345

Pack of 10 SH500590

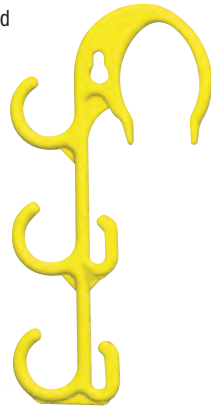

ELITE INDUSTRIAL ELECTRICAL HEATERS



1 Elite Heat Fixed or Swivel Quartz Halogen Infra Red Heater

The New design "Go Anywhere" Elite heat offers full product utilisation with its durable yet aesthetically pleasing design it looks good in Offices, Retail, Industrial, Production lines, leisure centres basically anywhere that needs short wave spot heating. Fitted with the Patented "Spring Mounted Cradle Frame" providing Assisted Vibration Technology, the New Elite heat will help to reduce element breakages when being moved around sites keeping your downtime to a minimum.

Invest in the best looking Infra Red heater today, and reap the rewards for years to come

Direct heating, does not heat the atmosphere. Instant heat at the touch of a button. 2 x 1400 Watt quartz elements. 110 Volt fitted with 32amp plug. 230 Volt fitted with 13amp plug. Fully portable with lockable castors. Heavy duty construction. H900 x W525 x D625mm. Weight 21kg.

Product Code:
110V EH115011900 230V EH230011900

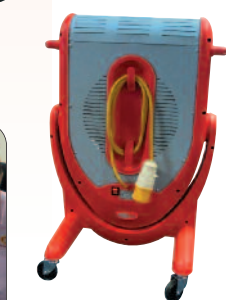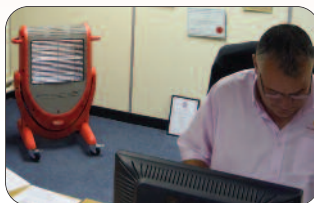

2 Elite Ceramic Heater

2.8kW Industrial Ceramic Heater. 110 Volt fitted with 32amp plug. H790 x W360 x D480mm. Weight 6kg. Product Code: EHC11505900

2.8kW Industrial Ceramic Heater. 240 Volt fitted with 13amp plug. H790 x W360 x D480mm. Weight 6kg. Product Code: EHC23005900



110 Volt &
240 Volt



Room/area heating

3 1.4Kw Ruby Quartz Infrared Heater Elements

Quartz halogen infrared 1400 watt. R7 fitting replacement lamp. Halogen infrared heat output 1.4kw. Reliable, efficient and effective. Length 348mm. Available in 110volt or 240volt.

110V Product Code: QHE110NS01295

240V Product Code: QHE240NS01295



ELITE COMMERCIAL/DOMESTIC ELECTRIC HEATERS (240V)

4 HN20/2 2kw Convector Heater

Modern Styling. Thermostat to control temperature. 3 heat settings. H420 x W610 x D130mm. Weight 3kg. Product Code: HN20/201295



Wall Mountable

5 HN25V 2kw Convector Heater (Turbo Boost)

Modern Styling. Thermostat to control temperature. 3 heat settings. Plus fan boost. H420 x W610 x D130mm. Weight 3.5kg. Product Code: HN25V01995



Wall Mountable

6 Oil Filled Radiator Heater

2kW Oil Filled Radiator. Adjustable thermostat. 3 heat settings. Overheat safety cut out. 9 oil filled panels. Mounted on castors. H640 x W500 x D255mm. Weight 13kg. Product Code: OFRH03950



7 HTE332 2kw Fan Heater

2.0kW output - 2 heat settings. Thermostat with frost protection. Cool air facility for summer use. H125 x W290 x D245mm. Weight 1.5kg. Product Code: HTE33201295





MASTER ELECTRIC FAN HEATERS

Room/area heating

1 Fan Heater 3kW

Air is blown over 2 specially aligned elements to produce a steady increase in room temperature. Thermostat Control with two heat settings 1.55kW or 3kW.

3kW Industrial Fan Heater.
110v fitted with 32amp plug.

Product Code: D3KWFH1106900

240v fitted with 13amp plug.

Product Code: D3KWFH2406500

Weight 5kg.



Room/area heating

110 Volt & 240 Volt

2 MASTER Electronic Fan Heater

Motor with thermal protection. Built in thermostat. Variable heat. Dimensions:

B15 L380 x W490 x H580mm. Weight 17kg. Product Code: B15022900

B22 L445 x W580 x H650mm. Weight 25kg. Product Code: B22032900



Model	B15	B22	RS30	RS40
Capacity kW	15	22	30	40
Capacity Btu	51,000Btu	75,000Btu	102,400Btu	136,500Btu
Voltage	415v	415v	415v	415v
Ducting	No	No	Yes	Yes
Settings	2	2	2	3
Power Lead	415v	415v	415v	415v

3 18 & 30kW 3phase Fan Heater

No oxygen consumption. No fumes, no odours, non humidity. Low noise 100% efficiency. Motor with thermal protection. Stainless steel heating elements. Overheat thermostat. Variable heat. Strong and lasting construction.

18kW SPECIFICATION

Capacity: kw: 4.5/9/13.5/18
Btu/h: 15,000 to 61,000
Kcal/h: 3,870-15,480

Air displacement: 1,700 m³/h
Power supply: 400/50
Rated current: 3 x 26A
Switch pos. 1: OFF
Switch pos. 2: Fan
Switch pos. 3: 9
Switch pos. 4: 18

Room Thermostat control: Optional
Temperature range: <25°C
Resistance norm: IPX4
Weight: 28kg
Dimensions: H430 x W390 x D620mm

Product Code: B18EPR36500

30kW SPECIFICATION

Capacity: kw: 15/30
Btu/h: 51,200 - 102,400
Kcal/h: 12,900 - 25,800

Air displacement: 3,500 m³/h
Power supply: 400/50
Rated current: 3 x 43.5
Switch pos. 1: OFF
Switch pos. 2: Fan
Switch pos. 3: 15.0
Switch pos. 4: 30.0

Room Thermostat control: Optional
Temperature range: <25°C
Resistance norm: IPX4
Weight: 51kg
Dimensions: H660 x W580 x D1020mm

Product Code: B30EPR64900



Ducting: (B18) Product Code: 4515.55309900
(B30) Product Code: 4031.40113090
(RS30) Product Code: 4515.55215045
(RS30HCK) Product Code: 4210.1802363
(RS40) Product Code: 4515.55215045
(RS40HCK) Product Code: 4210.1802363



* Ducting bags now available

4 RS30 & RS40 Fan Heater

Robust construction of thick sheet metal. Shock proof components. On board thermostats with provision for remote thermostats. Easily moved. External surface remains cold. Fast and efficient distribution of heat.

Product Code: (30kW) RS30044500

Product Code: (40kW) RS40051500



Power Lead 415v



B18 Product Code: (5m) 4511.03305777
B18 Product Code: (10m) 4511.03409306
B30 Product Code: (5m) 4511.035913325
B30 Product Code: (10m) 4511.03619272
(RS30) Product Code: 4210.18119272
(RS40) Product Code: 4210.18119272

Room Thermostat



Product Code: (3m) 4150.10503950
Product Code: (10m) 4161.96705291

MASTER DIRECT DIESEL OIL HEATERS



1 Direct Diesel Oil Heater B35/B70



Thermally protected motor. Safety photocell cut off. Electronic flame control. Possible connection to an optional room thermostat. Stainless steel combustion chamber. Standard oil tank. Durable external painted finish. Strong and lasting construction. Housing remains cool to the touch. Easy to move. High air displacement. Easy maintenance.

Room Thermostat



Product Code: (3m) 4150.10503950
Product Code: (10m) 4161.96705291

SPECIFICATION	B35*	B70*	*Trolley available
Capacity:	kw: 10 Btu/h: 35,000 Kcal/h: 8,800	kw: 20 Btu/h: 70,000 Kcal/h: 17,500	
Air displacement:	280 m³/h	400 m³/h	
Room Thermostat control:	N/A	Optional	
Fuel consumption:	0.86kg/h	1.72kg/h	
Blast temperature:	175°C	250°C	
Power supply:	230/50V/Hz	230/50V/Hz	
Rated current:	1.2A	1.2A	
Tank capacity:	15ltr	19ltr	
Weight:	19kg	19kg	
Height:	400mm	400mm	
Width:	350mm	350mm	
Length:	810mm	810mm	

CONSERVE FUEL
and save money
with a
ROOM THERMOSTAT



Product Code: B35027900

Product Code: B70029900

Trolley Product Code: 4201.15904420

Ventilation of the room is necessary to prevent a deficiency in oxygen supply

2 Direct Diesel Oil Heater B100/B150



Room Thermostat



Product Code: (3m) 4150.10503950
Product Code: (10m) 4161.96705291

Thermally protected motor. Safety photocell cut off. Electronic flame control. Possible connection to an optional room thermostat. Stainless steel combustion chamber. Standard oil tank. B100/B150 supplied as standard trolley. Durable external painted finish. Strong and lasting construction. Housing remains cool to the touch. Easy to move. High air displacement. Easy maintenance.

SPECIFICATION	B100	B150
Capacity:	kw: 29 Btu/h: 100,000 Kcal/h: 25,000	kw: 44 Btu/h: 150,000 Kcal/h: 38,000
Air displacement:	800 m³/h	900 m³/h
Room Thermostat control:	Optional	Optional
Fuel consumption:	2.45kg/h	3.72kg/h
Blast temperature:	250°C	300°C
Power supply:	110v/230v/50Hz	110v/230v/50Hz Dual Voltage
Rated current:	1.2A	1.2A
Tank capacity:	42ltr	42ltr
Weight:	28kg	28kg
Height:	450mm	450mm
Width:	400mm	400mm
Length:	1110mm	1110mm

CONSERVE FUEL
and save money
with a
ROOM THERMOSTAT



Product Code: B10038700 Product Code: (240v) B15040900

Product Code: (DV) B150DV42300

Ventilation of the room is necessary to prevent a deficiency in oxygen supply

3 Direct Diesel Oil Heater B230/B360



Room Thermostat



Product Code: (3m) 4150.10503950
Product Code: (10m) 4161.96705291

Thermally protected motor. Safety photocell cut off. Electronic flame control. Overheat Post-ventilation thermostat. Possible connection to an optional room thermostat. Stainless steel combustion chamber. Durable external painted finish. Oil tank with level indicator. Standard trolley. Strong and lasting construction. Housing remains cool to the touch. Easy maintenance with external pump. High air displacement.

SPECIFICATION	B230	B360
Capacity:	kw: 65 Btu/h: 222,000 Kcal/h: 56,000	kw: 111 Btu/h: 379,000 Kcal/h: 95,460
Air displacement:	3.000 m³/h	3.300 m³/h
Room Thermostat control:	Optional	Optional
Fuel consumption:	5.4kg/h	8.83kg/h
Power supply:	230v50Hz	230v50Hz
Rated current:	2.3A	4.6A
Tank capacity:	65ltr	105ltr
Weight:	72kg	123kg
Height:	1000mm	1070mm
Width:	650mm	750mm
Length:	1200mm	1590mm

CONSERVE FUEL
and save money
with a
ROOM THERMOSTAT

Product Code: B23089900

Product Code: B360109900

Ventilation of the room is necessary to prevent a deficiency in oxygen supply



MASTER DIRECT DIESEL OIL HEATERS

1 Direct Diesel Oil Heater B300CED



Twin construction allows selection between 44kW or 88kW heating. 110litre tank allows up to 26hrs of fuel autonomy from one heater. Rubber wheels allow easy movement, socket for optional remote thermostat. On board temperature display. One tank, one control: two heating units.

	B300CED	2 heaters on	1 heater on
Power:			
Btu/h		301.000	150.500
kW		88	44
kcal/h		75.800	37.900
Air displacement:	m ³ /h	1800	900
Fuel consumption:	kg/h	7	3.5
Tank:	Litres	105	105
Autonomy:	H	13 or more	26 or more
Remote Thermostat:		Possible	Possible
Electrical power:	kW	0.56	0.28
Power supply:	V/Hz	220-240	50
Weight:	kg	86	86
Dimensions	L1600 x W750 x H900mm		
Product Code:	B300CED73980		

MASTER INDIRECT DIESEL OIL HEATERS

2 Indirect Diesel Oil Heater BV77E



• Ducting available

Electronic flame control with photocell. Overheat thermostat. Possible connection to an optional room thermostat. Stainless steel combustion chamber. Heat exchanger. Oil tank with level indicator. Trolley included. Strong and long lasting construction. Housing remains cool to the touch. High air flow.

	BV77E
Power:	20 kW, 68.000 Btu/h 17.400 Kcal/h
Air displacement:	1.550 m ³ /h
Fuel consumption:	1,67 kg/h
Rated current:	1,5 A
Power supply:	110v/230v/50Hz Dual Voltage
Flue tube ø:	120 mm
Thermostat control:	optional
Blast opening ø:	203mm
Tank capacity:	37ltr
Dimensions	L1180 x W410 x H530mm
Weight:	32kg
Product Code:	BV77E69900

**CONSERVE
FUEL**
and save money
with a
ROOM THERMOSTAT

BV77E	
Adaptor ring kit 294mm diameter	Product Code: BV77HCK01260
BV77E	
Ducting 3mtr x 305mm diameter	Product Code: BV77EH04136
Ducting 7.6mtr x 305mm diameter	Product Code: 4515.55310370

Ventilation of the room is necessary to prevent a deficiency in oxygen supply

Optional Accessories



Chimney
Product Code:
(BV77E) 4013.26202776
Product Code:
(BV110-290) 4013.24903718



1m S/S Exhaust
Product Code:
(BV77E) 4013.2603632
Product Code:
(BV110-290) 4013.24304908

90° S/S Elbow

Product Code:
(BV77E) 4013.26105197
Product Code:
(BV110-290) 4013.24705727



Adaptor ring kit
Product Code:
(BV77E) 4032.95001260
Product Code:
(BV110-BV170) 4031.90901477
Product Code:
(BV290) 4031.91002363



Room Thermostat
Product Code: (3m)
4150.10503950
Product Code: (10m)
4161.96705291



* Ducting bags
now available

Ducting
Product Code:
(BV77E) 4032.95104136
Product Code:
(BV110-BV170) 4031.40112495
Product Code:
(BV290) 4031.3818480

MASTER INDIRECT DIESEL OIL HEATERS



1 Indirect Diesel Oil Heater BV170E/ BV290E

Safety photocell cut off. Electronic flame control. Overheat and post-ventilation thermostats. Possible connection to an optional room thermostat. Stainless steel combustion chamber. Heat exchanger. Durable external painted finish. Oil tank with level indicator. Standard trolley. Strong and long lasting construction. Housing remains cool to the touch. Easy maintenance with external pump. High air flow.



	BV170E	BV290E
Capacity:	kw: 47 Btu/h: 160,000 Kcal/h: 40,000	kw: 81 Btu/h: 276,000 Kcal/h: 69,500
Air displacement:	1.800 m³/h	3.300 m³/h
Thermostat control:	Optional	Optional
Fuel consumption:	3.9kg/h	6.8kg/h
Power supply:	110v/230v/50Hz Dual Voltage	110v/230v/50Hz Dual Voltage
Rated current:	2.3A	4.6A
Flue tube ø:	150mm	150mm
Blast Opening ø:	340mm	400mm
Tank capacity:	65ltr	105ltr
Weight:	86kg.	126kg.
Height:	1000mm	1170mm
Width:	660mm	750mm
Length:	1330mm.	1590mm
Product Code:	BV170E109900	BV290E134900

CONSERVE FUEL
and save money
with a
ROOM THERMOSTAT

BV170E Adaptor ring kit 400mm diameter **Product Code: BV170HCK01377**
BV170E Ducting 7.6mtr x 407mm diameter **Product Code: BV170H12495**
BV290E Adaptor ring kit 600mm diameter **Product Code: BV290HCK01377**
BV290E Ducting 7.6mtr x 610mm diameter **Product Code: BV290H18480**

Ventilation of the room is necessary to prevent a deficiency in oxygen supply

2 Indirect Diesel Oil Heater BV310FS



<ul style="list-style-type: none"> • Separate oil burner • Electronic flame control with photocell • Fan-limit thermostat with automatic reset • Limit thermostat with manual reset • Possible connection to an optional room thermostat • Summer-Winter switch for ventilation only • Fuel pre-heating • Standard trolley • Can be used with flexible coated tubes • Stainless steel combustion chamber • Heat exchanger with high efficiency • Two oil filters: oil pump filter and suction filter • Durable external double powder coating • Ducting available 	Power: 75 kW, 256.000 Btu/h 64.500 Kcal/h Air displacement: 4.400 m³/h Fuel consumption: 6.4 kg/h Rated current: 6.2 A Power supply: 230v/50Hz Flue tube ø: 150 mm Fan: axial Thermostat control: optional Blast opening Ø: 450mm Tank capacity: optional Weight: 162 kg Dimensions : L1500 x w620 x h1085mm Product Code: BV310FS209900
---	---



<ul style="list-style-type: none"> • Separate oil burner • Safety photocell cut off • Electronic flame control • Fan-limit thermostat with automatic reset • Limit thermostat with manual reset • Possible connection to an optional room thermostat • Summer-Winter switch for ventilation only • Fuel pre-heating • Standard trolley • Can be used with flexible coated tubes • Stainless steel combustion chamber • Heat exchanger with high efficiency • External painted steel double plate 	Capacity: kw: 220 Btu/h: 751.000 Kcal/h: 190.000 Air displacement: 12.500 m³/h Room Thermostat control: Optional Fuel consumption: 18.5kg/h Power supply: 230v/50Hz Rated current: 7.6A Flue tube dia.: 200mm Blast opening dia.: 4 x 290mm Weight: 357kg. Height: 1570mm Width: 990mm Length: 2670mm Product Code: BV690FS339900
---	--



Nationwide: 0845 309 0707 London: 0208 830 8333



MASTER PROPANE HEATERS

1 Battery Powered Propane Heater BLP17M (D/C)



Li-ion Ah Master battery pack allows more than 8 hours continuous heating. Works at low temperatures.



Master charger charges battery in less than 1 hour.



Emergency heating. Outdoor heating. Defreezing. Long autonomy (8h). 14.4V low working tension assures safety in every condition. Safety gas valves detects gas leaks. The heater can work directly from 110v, 240v or via the battery. Battery change in 5 seconds. Battery interface accepts Li-ion battery BAT3 from master.

	BLP17M(DC)	min	max
Power:			
Btu/h		34.200	54.800
kW		10	16
kcal/h		8.600	13.800
Tension:	V	14	14.4
Air displacement:	m ³ /h	300	300
Pressuer (supply)	Bar	0.7	0.7
Fuel consumption:	kg/h	1.16	1.16
Electric autonomy:	H	8 or more	8 or more
Safety Gas valve		yes	yes
Electrical power:	Watt	5	5
Power supply:	V/Hz	110-240	50
Weight:	5kg		
Dimensions (packaging)	L550 x W230 x H300mm		
Product Code:	BLP17MDC015900		

2 Propane Heaters



BLP103

- Motor with thermal protection.
- Over heat thermostat.
- Variable heat.
- Dual Voltage.
- Standard Equipment:
- LPG pressure reducer with security valve.
- Propane gas hose 1.5mtr.

Dimensions:

BLP103 H610 x W436 x L990mm. Weight 35kg.

Product Code: BLP103052500

BLP73 H510 x W310 x L770mm. Weight 14.4kg.

Product Code: BLP73029900

BLP53 H300 x W210 x L490mm. Weight 12.5kg.

Product Code: BLP53023900

BLP15 H300 x W210 x L490mm. Weight 5kg.

Product Code: BLP1509900



BLP73



BLP53

Model	BLP103	BLP73	BLP53	BLP15
Capacity kW	96	69	52	15
Capacity Btu	327,000Btu	235,000Btu	177,000Btu	51,000Btu
Voltage	Dual	Dual	Dual	240v

Ventilation of the room is necessary to prevent a deficiency in oxygen supply

MASTER OIL HEATERS

1 Infrared Oil Heater

- Radiant heating.
- No air flow.
- Low noise.
- Professional oil burner.
- Electronic Flame control.
- Safety Photocell cut off.
- Oil level indicator.
- Robust construction.
- Easy maintenance.
- Multidirectional.
- Post-ventilation.
- Ceramic fibre combustion chamber.
- Can be connected to an additional room thermostat.
- Weight 82kg.
- Dimensions: H1130 x W750 x L1200mm



Model	XL9S (2 Stage)
Capacity kW	29 - 43
Capacity Btu	100,000 - 148,000Btu
Voltage	240v or 110v

Product Code: DXL9S129900

Model	XL9E
Capacity kW	43
Capacity Btu	148,000Btu
Voltage	240v or 110v

Product Code: DXL9114900



Fuel Pre Heater
Product Code: 4031.1207426



Room Thermostat

Product Code: (3m) 4150.10503950
Product Code: (10m) 4161.96705291

2 Infrared Oil Heater 110v/240v

- Radiant heating.
- No air flow.
- Low noise.
- Professional oil burner.
- Electronic flame control.
- Safety Photocell cut off.
- Thermostat control.
- Post-ventilation.
- Ceramic fibre combustion chamber.
- Oil level indicator.
- Robust construction.
- Easy maintenance.
- Multidirectional.
- Weight 20kg.
- Dimensions: H580 x W38 x L60mm.



Model	XL6
Capacity kW	17
Capacity Btu	58,000Btu
Voltage	110v or 240v

Product Code: (240V) XL6034900
Product Code: (110V) XL611036900



Trolley available
Product Code: 4201.15904420

3 Cabinet Heater (Not catalytic)

- 3 heat settings.
- Piezo ignition.
- Oxygen Depletion Device.
- Flame Failure Device.
- Anti tilt switch.
- Fold out bottle tray.
- Maximum heat output 4.2kW.
- Weight: 8.5kg.
- Dimensions: H720 x W410 x D360mm.
- Product Code: CABINET5695



4 Free Standing Propane/Butane Plaque Heater

14000Btu. Industrial site heater.
Complete with hose and regulator.
Product Code: FSPH03900

MASTER SPECIALIST HEATERS

5 MASTER CT50P Solid Fuel Heater

Power: 50,0 kW
170,000 Btu/h
43,000 Kcal/h
Air displacement: 1200 m³/h
Fuel consumption: 15.0 kg/h
Rated current: 0.6 A
Power supply: 230v/50Hz
Flue tube ø: 150mm
Weight: 302kg
Dimensions: L1315 x W775 x H1190mm
Product Code: DCT50P149900



- Manual ignition system
- Wood as fuel (possibility)
- Cheap fuel
- Combustion system - air flow

Ventilation of the room is necessary to prevent a deficiency in oxygen supply

6 MASTER WA33B Universal Oil Heater

Power: 33,0 kW
113,000 Btu/h
29,000 Kcal/h
Air displacement: 1000 m³/h
Fuel consumption: 2.9 kg/h
Rated current: 0.74 A
Power supply: 230v/50Hz
Flue tube ø: 150mm
Weight: 86kg
Dimensions: L540 x W860 x H1370mm
Product Code: WA33B99900



- Manual ignition system
- Cheap fuel
- Combustion system - air flow
- Ideal for Industrial Workshops, Warehouses, Sports Facilities



SUBMERSIBLE PUMPS

1 JS400 2" Submersible Drainage Pump (Automatic or Manual)

240v or 110volt motor. Cast iron and stainless steel construction. 240 l/m max flow and 12m max head. 400w heavy duty motor. Twin mech seals. 10m cable. Fitted with Float Switch.

Product Code: JS400110A20900 Product Code: JS400240A20900

Product Code: JS400110M18500 Product Code: JS400240M18500



Replacement Cable

Product Code: JS400CABLE03400

Product Code: JS400CABLECWFLOAT07400

2 RSD400 Residue Pump

240v or 110volt 50hz. 400w motor. Twin Mech seal. 30mm 25mm 19mm 15mm Stepped outlet. 10m main power cable. stainless steel case. Rubber base.

Product Code: RSD400110V24900

Product Code: RSD400240V28900

Lay Flat Hose to suit 1 1/4" by 10m

Product Code: LF11410M01265



ARRIVING SOON!*

3* SPK450 - Residue Pump (Suck down to 1mm)

The outlet can be adjusted to suit the application required such as top outlet or side discharge. 110volt 50Hz. 450watt Motor. 1" (25mm) Outlet. Durable SiC mechanical seal. Bottom plate made of heavy duty rubber, corrosion proof and very durable. Maximum head height of 10m.

Product Code: SPK450110V



4* SPK450A - 2" (Dirty water) Submersible Pump

The outlet can be adjusted to suit the application required such as top outlet or side discharge. 110volt or 240volt 50Hz. 450watt Motor. 2" (50mm) Outlet. Motor thermal protectors. Maximum head height of 11m.

Product Code: SPK450A110V

5* SPK450AF - 2" (Dirty water) Submersible Pump with Float Switch

The outlet can be adjusted to suit the application required such as top outlet or side discharge. 110volt or 240volt 50Hz. Float switch for intermittent water flow. 450watt Motor. 2" (50mm) Outlet. Motor thermal protectors. Maximum head height of 11m.

Product Code: SPK450AS110V



6 Ponstar 2 " Heavy Duty Automatic or Manual Contractors Submersible Pump

240volt or 110volt. Suitable for clean and black water site drainage. Fitted mac-3 float for auto operation. SiC Mech seal. 300 l/m max flow. 10m max head. 600w motor. 10m power cable.

Product Code: PNSTR110A24900

Product Code: PNSTR240A26900

Product Code: PNSTR110M21900

Product Code: PNSTR240M23900

Replacement Cable

Product Code:

JS400CABLE03400

Product Code:

JS400CABLECWFLOAT07400



7 2" Lay Flat Hose

Product Code:

1 1/4" x 10m length LF11410M01265

2" x 100m roll LF210009170

2" x 10m length LF210M01210



DEHUMIDIFIERS/DRYING EQUIPMENT



1 Industrial Dual Voltage Dehumidifiers

D60DVB Removes up to 60 litres of moisture per day (30°C RH80%). Quiet in Operation. Operating range 5°C - 30°C. Permanent drain only. Standard outlet stub for garden hose. Pop out drip tray. Dual voltage-switch operated. Air Displacement 500 m³/h. Weight 36kg. Dimensions: H950 x W360 x D410mm.

Product Code: D60DVB63900



D30DVB Removes up to 30 litres of moisture per day (30°C RH80%). Auto voltage changer. Air Displacement 282 m³/h. Weight 23kg. Dimensions: H550 x W320 x D400mm.

Product Code: D30DVB44500

2 DH720 Dehumidifier 20 Litre (240v)

Compact plastic casing. Light, easy to transport. Quiet and simple operation. Tank full indicator. Active carbon filter absorbing unpleasant odour. Electronic control panel. Dimensions: H580 x W460 x D260mm.

Product Code: DH72014900



3 DHA10 Adsorptive Dehumidifier (240v)

Work efficiently in low temperatures. Water full tank indicator. Clothes dryer program. Easy to operate. Clear control panel. Light and easy in transport. Environmentally friendly. No compressor-less noise. 2 speed fan Active carbon filter. Humidity removal capacity: (30°C/80% RH): 9.0 l/24h. Timer: 1-24 hours. Dimensions: L200 x W445 x H525mm.

Product Code: DHA1015900



4 DH731 Dehumidifier (240v)

Compact, metal casing. Tank full indicator. Water tank with automatic shut-off. Dimensions: L460 x W385 x H650mm

Product Code: DH731027900



5 DH745 Dehumidifier (240v)

Compact, plastic casing. Light, easy to transport. Quiet operation. Tank full indicator. Active carbon filter absorbing unpleasant odour. Electronic control panel. Transparent water tank. Dimensions: L575 x W290 x H565mm.

Product Code: DH745025900



6 DH26 MASTER Dehumidifier (240v)

Steel casing. Large wheels and handle. Large water tank with automatic shut-off when full. Tank full indicator. Automatic fast defrosting by hot gases.


Dimensions: L440 x W430 x H730mm
Product Code: DH26039500



7 DH732 Dehumidifier (240v)

Compact metal casing. Tank full indicator with automatic shut-off. Net weight: 22 kg. Dimensions: L460 x W385 x H650mm.

Product Code: DH731027900

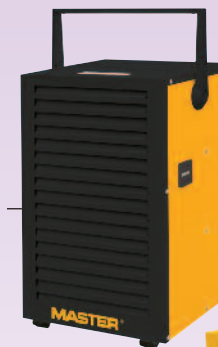

8 DH44 & DH62 Dual Voltage Dehumidifier

Steel casing. Large wheels and handle. Large water tank with automatic shut-off when full. Tank full indicator. Automatic fast defrosting by hot gases.

DH44 Packaging dimension: L590 x W580 x H830mm. Product Code: DH44056900

DH62 Packaging dimension: L590 x W580 x H850mm. Product Code: DH62065900



9 MASTER Dual Voltage Dehumidifier DHP45 & DHP65

Roto-molded body, easy inspection, easy cleaning. Robust case, scratch proof & bump proof. On board humidity setting. Hour counter. Power counter showing power used.*

Dimensions:

L590 x W580 x H850 (box).


Product Code: DHP45DV79900

Product Code: DHP65DV93500

*Optional water pump available



SPECIFICATION		DH720	DHA10	DH731	DH745	DH732	DH44	DH62	DHP45	DHP65
Capacity	L/24H	20	9	30	45	30	40	52L	42	52
Air Displacement	M3/H	215	200	160	300	160	480	480	480	580
Operating Range	Temperature °C	5-35	1-35	5-35	5-35	5-35	3-35	3-35	3-35	3-35
	Humidity %	35-90	35-90	35-90	35-90	35-90	35-99	35-99	35-99	35-99
Power Supply	V/Hz	230-240/50	230-240/50	230-240/50	230-240/50	230-240/50	Dual voltage	Dual voltage	Dual voltage	Dual voltage
Power Consumption	W	370	780	680	830	680	780	950	700	800
Refrigerant		R-134a	-	R-410a	R-410a	R-410a	R-407a	R-407c	R-407c	R-407c
Tank Capacity	L	5.5	3.5	6.5	4	6.5	11	11	16	16
Net Weight	Kg	13	8.5	19.5	18	19.5	43	45	43	45
Continuous Operation		Yes	No	Yes	No	Yes	Yes	Yes	Yes	Yes
Build in Hydrostat		Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes

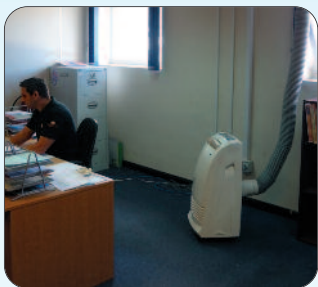

Create a pleasant working environment in offices, computer rooms and conference rooms with our range of mobile Air to Air units delivering refrigerated dry air. Complete with automatic thermostat controls, easy to operate temperature and fan controls. Available with direct hot air exhaust or water collection.

Efficient and quiet

Advanced technology is employed to lower noise and increase efficiency.

Powerful dehumidification

After initial cooling, the air conditioners produce a breeze at low frequency to dehumidify the room without great temperature alteration.

Energy-saving

Low power consumption, whilst still providing larger outputs of cold air.

Powerful cooling

Producing powerful and rapid air cooling to a large area.

Wide angle dispersion

Curved air-deflector provides wide angle airflow for quicker air movement.

A STEP BY STEP GUIDE TO THE COOLING REQUIREMENTS FOR THE AVERAGE OFFICE

Calculate the volume of the area to be cooled in cubic metres, Width x Height x Depth and multiply this volume x 42. (This gives the area requirements in Watts). N.B. If this area size is calculated in cu ft., divide by 35 to give the size in cubic metres.

A) Number of people	x	150watt	=
B) Number of computers	x	200watt	=
C) Number of printers	x	250watt	=
D) Number of fax machines	x	150watt	=
E) Tea/Coffee machines	x	1000watt	=
Appropriate Model -					Total watts
2.9Kw = 10,000Btu					
4.1Kw = 14,000Btu					+ Room watts
4.6Kw = 16,000Btu					Grand Total in watts

AIR CONDITIONERS

1 AC1000 (10,000 Btu) Air Conditioner

Cooling efficiency: A.
Fan speed: 3. Timer: 24h.
Carbon filter. Ionization.
Remote control.
Additional water tank.
Cooling capacity: 2.930W.
Energy consumption: 1.137W.
Air volume: 480 m³/h.
Suitable area: 60 m².
Humidity removal: 1.2 l/h.
Indoor noise level: 54 dB (A).
Refrigerant: R410a.
Outlet pipe length: 1500mm.
Outlet pipe dia: 142mm.
Working temperature: 18-32°C.
Power supply: 220-240/50V/Hz.
Weight: 27.5kg.
Dimensions: L420 x W405 x H790mm.

Product Code: AC100029900



Replacement Ducting

AC1000 Product Code: 4603.1002672

AC1400 Product Code: 4603.1002672

AC1600 Product Code: 4603.1002672

2 AC1400 (14000 Btu)/AC1600 (16000 Btu) Air Conditioner

Cooling efficiency: A. Fan speed: 3. Timer: 24h.
Carbon filter. Ionization. Remote control.
Additional water tank. Power supply: 240v/50Hz
Dimensions: L422 x W443 x H825mm.

	AC1400	AC1600
Cooling capacity:	4.1kW	4.6kW
Energy consumption:	1137W	1875W
Air volume:	550m³/h	600m³/h
Suitable area:	80m²	90m²
Humidity removal:	1.6l/h	2.0l/h
Indoor noise level:	56dB (A)	54dB (A)
Refrigerant:	R410a	R410a
Outlet pipe length:	1500mm	1500mm
Outlet pipe dia:	142mm	142mm
Working temperature:	18-32°C	18-32°C
Weight:	33kg	37kg
Product Code:	AC140035900	
Product Code:	AC160039900	



3 Air Conditioner Transit & Storage Cover

The Hsc transport and storage cover fits most 9,000Btu -15,000Btu Air conditioners. Helps to eliminate strap marks whilst in transit and keep dust off whilst in storage. Product Code: HSC12iC00299



EVAPORATIVE BIO COOLERS

4 Master Bio Coolers

BC35

Master Bio Coolers cool the air using a simple natural process:
A pump takes the water from a tank and wets a wide filter of natural cellulose. A powerful ventilator aspirates air through the filter. The water evaporates from the filter and decreases the temperature of the air several degrees. The fresh and clean air flows into the ambient and cools it.

	BC35	BC60
Airflow:	3.500m³/h	6.000m³/h
Range:	30m³	60m³
Voltage:	240v	240v
Power:	180W	280W
Noise Level:	<62dB	<62dB
Water Tank:	45l	57l
Water Flow:	3l/h	7l/h
Fan Speed levels:	3	3
Ionizer:	Yes	Yes
Control Panel:	LCD	LCD
Remote Control:	Yes	Yes
Weight:	32kg	38kg
BC35:	L420 x W570 x H1680mm	
BC60:	L560 x W780 x H1380mm	
Product Code:	BC35038200	
Product Code:	BC60042500	



BC60

COOLING FANS

1 30" Dual Voltage Fan

Air Flow Max (m³/h): 16,800.
2 speed settings. Electrical Input:
240V/110V, phase 50Hz.
Fuse Rating (A): 3.
Control Positions: Tilttable.
Blade Size: 30".
Dimensions:
H910 x W935 x D330mm.
Weight: 24kg.


Product Code: 30DVFAN21900



2 30" Dual Voltage Fan

Adjustable air stream. 360° rotation.
Powder-coated casing.
Wide and short air stream.
Power supply: 110v/50Hz/240v/50Hz.
Air displacement: 19,200m³/h.
Fan speed: 2. Outlet diameter: 30".
Power consumption: 335/378W.
Dimensions:
L930 x W260 x H935mm.
Weight: 16.5kg.

Product Code: MF30P22900 (240v)
Product Code: MF30PDV22900 (DV)

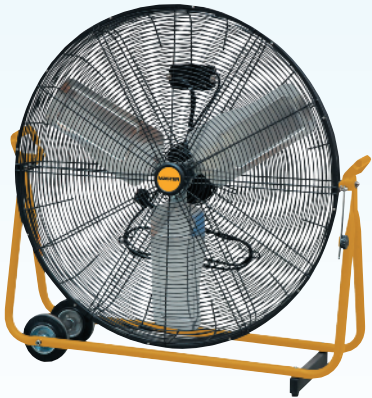

3 20" 240 Voltage Fan

Adjustable air stream. 360° rotation.
Powder-coated casing.
Wide and short air stream.
Power supply: 240v/50Hz.
Air displacement: 8,040m³/h.
Fan speed: 3. Outlet diameter: 20".
Power consumption: 98/110/115W.
Dimensions:
L700 x W210 x H685mm.
Weight: 17kg.

Product Code: MF20P8900



4 5000 CFM Industrial Man Cooler

Manufactured to the highest standards. Built
to withstand the rigours of your industry.
Air Flow Max (m³/hr): 8,000.
Air Flow Max (cfm): 5,000 +/-6%.
RPM: 0-1350. Electrical Input:
230V single phase 50Hz (115V S/P).
Fuse Rating: 230V 5amp/115V 10amp.
Control Positions: 3 Speed settings.
Variable Speed: 0-1350rpm.
Blade Size(cm): 50. Blade Size(in.): 20.
Dimensions: H820 x W800 x D320mm.
Weight: 27kg. IP20

Product Code: T5000115025900 (115v)

Product Code: T5000240025900 (240v)



5 CB3000 110v Carpet Blower/Dryer

High airflow for rapid drying. Ideal for drying
after floods or spillage. Aids air circulation and
ventilation. Vertical position dries walls and
ceilings. 3 speed switch to select the optimal
airflow. Robust polyethylene casing.
Dimensions: W440 x H540 x D590mm.
Weight 17kg. CFM 3000, 3 speed. 110v.


Product Code: CB300019900



6 HV180 Commercial Fan

Air Flow Max (m³/hr): 5,200.
Air Flow Max (cfm): 3,060.
Electrical Input: 240V single
phase 50Hz. Fuse Rating (A): 3.
Control Positions: 4.
Blade Size (cm): 45.
Blade Size (in.): 18.
Dimensions:
H540 x W580 x D200mm.
Weight: 8.9kg.

Product Code: HV18003495

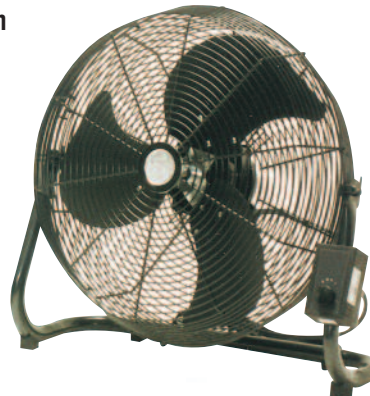

PORTANAILER NAILERS

7 Portanailer

Designed to nail flooring without splitting the
tongue or damaging the floor surface. One mallet
blow drives the cleats® nails into the tongue and
groove flooring at the perfect 45° angle, while
countersinking the nail to the correct depth.
The nailer uses 1½" and 2" cleats® nails.



PORTANAILER KIT

Consisting of P402A Nailer, Heavy Duty
Mallet, Heavy Duty Carrying Case and
1000 of each cleat 1½" and 2".

Product Code: PN402A022900

Cleats (packs of 1000). Sizes available:

1½" Product Code: PCT112001285

2" Product Code: PCT2001395

POWER NAILERS

8 Tongue and Groove Nailer (P45)

The only nailer that can use 1½", 1¾" and 2" Powercleats® nails and
can be used to nail ½", 25/32" and 33/32" tongue and groove hard-wood
flooring through the use of easy-to-change adaptor plates.

POWER NAILER KIT

Consisting of P45 Nailer, Heavy Duty Mallet, Heavy Duty Carrying Case
and 2000 of each cleat 1½", 1¾" and 2".

Product Code: PNRKIT0029900



9 Mallets

Heavy duty mallet with Rubber face
for long life.

Product Code: PNM003999

10 Powercleats (packs of 1000)

Sizes available:

1½" Product Code: PC112001285

1¾" Product Code: PC134001335

2" Product Code: PC2001395



PROFESSIONAL GAS EQUIPMENT

1 Tar Boiler Kits



Available with tap to order

Manufactured from high quality heavy gauge steel. Welded to the highest standard using the latest techniques to ensure a long life. Removable inner tank - Enclosed burner bracket. Heavy duty burner - Regulator adjustable 0-4 bar. 12 foot of armoured hose. Available in: 10 Gallon kit and 15 Gallon kit.

10 Gallon - **Product Code: 10GKIT22900**

15 Gallon - **Product Code: 15GKIT24200**


10 Gallon - complete with tap **Product Code: 10GKIT27200**

15 Gallon - complete with tap **Product Code: 15GKIT32500**

2 Gas Torches with Regulator



All gas torches are supplied with 5m of rubber hose/fittings and regulator.

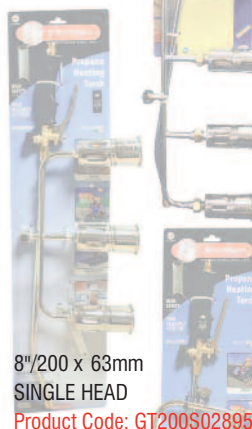

8"/200 x 63mm
SINGLE HEAD

Product Code: GT200S02895

24"/600 x 63mm
SINGLE HEAD

Product Code: GT600S03250

24"/600 x 45mm
DOUBLE HEAD

Product Code: GT600203995

24"/600 x 45mm
TRIPLE HEAD

Product Code: GT600304750

Plumbers torch kit.

Product Code: PTK02759



3 Super Gas Torch

Complete with 5m hose and 0-4 bar regulator with Piezo Igniter, available with 600mm stem and 60mm burner head. **Product Code GT600S03695**



4 Accessories

Galvanised V-Lipped bucket.

Product Code: GVLB01595

Ladle. **Product Code: TPL01150**

Burner only. **Product Code: TPB07816**

Adjustable regulator 0-4 Bar.

Product Code: REG00895



ELITE FUME EXTRACTORS

The Elite range of Fume Extractors have a 1.5mm high grade steel body with an aluminium alloy motor housing, providing excellent heat elimination and a reduction in weight. The overall design of the extractors gives exceptional air flow and pressure. The ducting is made from a flexible fire retardant material and is available in two lengths, 5m and 10m.

1 ELITE 450

Blade Diameter: 450mm
Voltage: 110v or 230v
or 3 phase
Power: 1700watt
Rotation Speed: 2800 (r/min)
Air Flow: 125 (m³/min)
Static Pressure 520 (Pa)
Weight: 27kg
Product Code: E450FE115035975 (115v)
Product Code: E450FE380035975 (380v)




With 10m Ducting. Product Code: E45010M49900
10m Ducting Only. Product Code: FED45016950

2 ELITE 300

Blade Diameter: 300mm
Voltage: 110v or 230v
Power: 520watt
Rotation Speed: 2800 (r/min)
CFM: 195
Air Flow: 60 (m³/min)
Static Pressure 343 (Pa)
Weight: 14kg
Product Code: E300FE018900



With 5m Ducting. Product Code: E3005M22500
With 10m Ducting. Product Code: E30010M26500
5m Ducting Only. Product Code: FED300505000
10m Ducting Only. Product Code: FED30009500

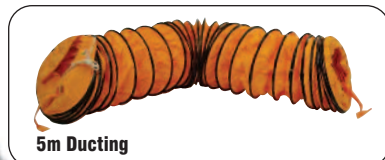

**FOR AIR
EXTRACTION
AND FRESH
AIR SUPPLY**

3 ELITE 250

Blade Diameter: 250mm
Voltage: 110v or 230v
Power: 320watt
Rotation Speed: 2800 (r/min)
CFM: 140
Air Flow: 43 (m³/min)
Static Pressure 294 (Pa)
Weight: 12kg
Product Code: E250FE016900



With 5m Ducting. Product Code: E2505M20000
With 10m Ducting. Product Code: E25010M22500


5m Ducting Only. Product Code: FED250504500
10m Ducting Only. Product Code: FED25007900

4 ELITE 200

Blade Diameter: 200mm
Voltage: 110v or 230v
Power: 150watt
Rotation Speed: 2800 (r/min)
CFM: 80
Air Flow: 25 (m³/min)
Static Pressure 245 (Pa)
Weight: 9kg
Product Code: E200FE013900



With 5m Ducting. Product Code: E2005M16500
With 10m Ducting. Product Code: E20010M19000
5m Ducting Only. Product Code: FED200504000
10m Ducting Only. Product Code: FED20006500

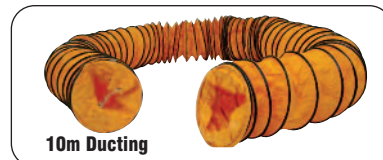

5 Ducting Bags

Heavy duty Ducting Bags will hold one 10m x 300m ducting or 2 x 5m lengths. Product Code: FEDB00895



1 YEAR WARRANTY



Ducting available separately



DUSTLESS CONTAINMENT SYSTEM

GO DUSTLESS!

THE LEADING DUST CONTAINMENT SYSTEM

- Capture up to 99% of airborne particulates.
- Protects yourself and colleagues from harmful airborne particulates.
- Eliminates the time and expense of messy clean-ups.
- Saves money with an economical system.
- Saves valuable time.

Systems for:

- Hand-held Grinders.
- Core drills.
- Drywall sanding.
- Paint Scraping.
- Floor Sanding.

NOT ALL VACUUMS ARE CREATED EQUAL!

The problem with traditional shop vacs is that they 'cough' out fine dust when they are turned on; and you have to open the unit to change filters - allowing dust to escape. You also have to change the filter set up when changing from dry to wet vacuuming.

Our vacuum solves all these problems and more...

The dustless Wet/Dry Vacuum is specifically designed to handle the extremely fine dust created by, stone, fibreglass, drywall and similar materials.



Without



With



BUILD A COMPLETE SYSTEM

Pair your Dustless Wet/Dry vacuum or HEPA Vacuum with any of these dust containment accessories to build a complete system.

- **DustBuddie™**
- **Dustie™**
- **DustHoodie™**
- **FlatBoy™**
- **Turbo Drywall Sander**
- **PaintBuddie™**
- **BitBuddie™**
- **CutBuddie II™**
- **Mortar Raking Kit**
- **Recip Saw**

For optimum performance use attachments with the Dustless vacuum.

Born from 'vacuum/technology', it has several patented features that help you save time and money; provide a healthier work environment, and extend the life of your hand power tools.

Dustless Wet & Dry Dust Extraction Vacuum (Classification Pending)

- CFM - 116.
- **Change from dry to wet vacuuming without stopping.**
- Designed for the extra fine dust from drywall and concrete.
- **No 'coughing' out dust when turned on.**
- Clean filters without taking the lid off - cleaner operation.
- **Quiet operation - only 81 decibels.**
- Powerful 1300watt motor.
- **1 year limited warranty.**
- 3.5mtr suction hose.

110V Product Code: DT16003019900

240V Product Code: DT1600324023900

THREE GREAT FILTER OPTIONS!

1. Primary & Secondary Filters

Internal secondary and primary filters are machine washable and designed to last the life of the machine.

Filters stay dry at all times so no need to remove when shifting from dry to wet vacuuming.

Keep dust inside when cleaning the filters. A simple flick of the cleaning agitator rod knocks dust off the internal filters without opening the unit.



2. Optional Micro Prefilter

Patent-pending disposable micro-prefilter provides 5 additional layers of filtration for ultimate dust control (down to 5 microns). Made of durable, water resistant, synthetic fabric, it retains its strength when wet and enhances productivity by reducing the need to clean the primary and secondary filters. It also helps extend the life of a HEPA filter.

Product Code: DT1315100999



3. HEPA Filter

Our HEPA filter captures airborne particulates down to 0.3 microns to meet current standards for protecting workers from harmful dust created by grinding and sawing concrete, fibreglass, stone and other materials.

Product Code: DT13201010616



DUSTLESS CONTAINMENT SYSTEM




1 DustBuddie

- Fits most 4" - 5" & 7" - 9" hand grinders.
- Easy to install.
- Clear polycarbonate for improved visibility and durability.
- Removable front edge of shroud for grinding close to wall or edge.
- Brush skirt for improved performance on textured surfaces.



• Power tool not included

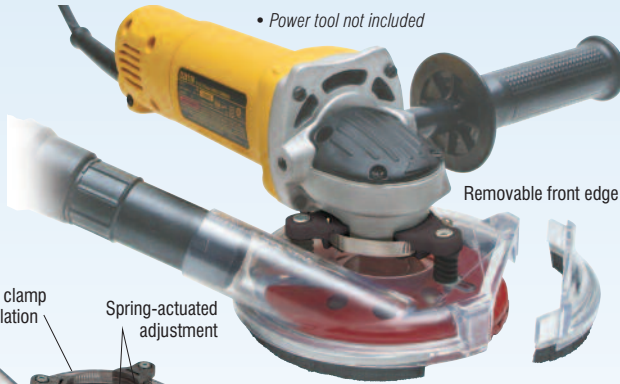

Band clamp installation

Spring-actuated adjustment

Brush skirt

Product Code:
5" DustBuddie DT183505699

Product Code:
9" DustBuddie DT185005999



2 Dustie



- Fits most 4" - 5" hand grinders.
- Easy to install.
- Front edge of shroud can be cut away for grinding close to a wall or edge.

4-5" Product Code: Dustie DT183601599

7-9" Product Code: Dustie DT185402999



3 Drywall Finishing Sander

Sanding sheets in packs of 25 x 120g, 180g or 220 grit.



- Orbital sanding head does the work for you.
- Pole extends 2 metres for tall ceilings.
- Lightweight.
- Sands in corners.
- Converts to hand sander.
- For optimum performance use with the Dustless vacuum.

Turbo Drywall Sander
Product Code:
DT5000108900

Turbo Drywall Sander

4 SawBuddie™ Dust Shroud For Reciprocating Saws

- Save time & money by eliminating cleanup.
- Captures 99% of airborne dust.
- Fast & easy to install.
- Unobscured view of blade for precise cutting.
- Clear flexible rubber shroud.
- Velcro strap installation.
- 2 1/2" long bristles with line-of-site gap.
- Fits wide variety of reciprocating saws.
- Bristled snout for flexibility.
- Durable components.
- Rotates to match blade installation.

Product Code DT241504859



• Power tool not included



5 Bitbuddie



200mm Bitbuddie



34mm Bitbuddie



• Power tool not included



100mm Bitbuddie



- Cut to size, 25mm to 100mm
- Excellent for tight places like drilling in stone countertops.
- Flexible translucent rubber dust shroud
- Capture dust and slurry.
- Suction holds it in place.

34mm

Product Code: BitBuddie DT19002199

25mm to 100mm

Product Code: BitBuddie DT190502495

200mm

Product Code: BitBuddie DT190802856



DUSTLESS CONTAINMENT SYSTEM

1 Cutbuddie



- The No1 choice for dust collection when cutting, tuck pointing or motor raking with a hand grinder.
- Fits most 4" - 5" and 6" - 9" hand grinders.
- Captures 99% of airborne dust.
- Fast and easy to install.
- Clear polycarbonate for improved visibility.
- Integrated universal adaptor.
- The CutBuddie II is simply the best dust collection system you can find for hand grinders. Durable, unobtrusive, easy to install and reliable.
- Installation is quick and simple, adjust the set screws in the universal adapter, slip it on the grinder and tighten the band clamp, and you're ready to go!
- Unlike awkward metal shrouds, the CutBuddie II is sleek and see-thru so it does not interfere with operator visibility.
- The sleek, see-thru design enables contractors to deliver more precise, higher quality work.
- The CutBuddie II is a durable dust control system that will last and last. It's made of highly durable polycarbonate - a space-age polymer that rivals tempered steel in tensile strength and durability.

Product Code: Cutbuddie (4-5") DT173008499

Product Code: Cutbuddie (7-9") DT184808925



• Power tool not included

2 Paint Buddie



- Capture paint chips as they are made.
- Works on both sides of the blade for collecting debris in both directions.
- 50mm wide.

2" PaintBuddie 61001

Product Code: DT6100101499



3 Hepa Vacuum

(Classification Pending)



Our certified HEPA Vacuum provides filtering down to 0.3 microns and removes 99.97% of airborne particulates.

If you buy a HEPA vacuum, make sure it's certified. Our certified HEPA vacuum will keep you in compliance with current and upcoming regulations.

Available in 110 and 240v

HEPA Vacuum

Product Code:

110V DT16006H29900

Product Code:

240V DT16006H24033900



• 3.5mtr Suction Hose

Dustless
TECHNOLOGIES UK

Deadly dust is spreading at construction sites and recent studies indicate that construction workers are increasingly exposed to dangerous levels of crystalline silica or concrete dust. Unlike low cost domestic vacuums, Ermator HEPA Dust Extractors are equipped with tested and certified HEPA filters that trap the smallest, most dangerous dust particles.

The HEPA Dust Extractor not only exhausts perfectly clean air, it is also efficient in the fast recovery of bulk dry dust, debris and other construction site building materials. Can also be connected to electrical power tools to extract the freshly cut concrete dust.

1 S13 HEPA Dust Extractor

S13 Features **H CLASS**

Jet Pulse for efficient cleaning without opening vacuum. Steel clamps secure vacuum during transport, corrosion resistant. 2" Hose inlet offset for maximum cyclonic separation of dust, maximizes airflow (CFM). Includes safety cap for safe transportation and storage. Bag retaining strap secures bag during operation, fast and easy removal and replacement. 6 mil, 4 gallon, disposable Poly Bag. Strong, safe and convenient for disposable and handling of dust. Welded frame/platform with 3" swivel locking castors offer sturdy support and mobility even when the bag is full. Steel handle to ease mobility. East access and storage of wand and floor tool. Tested and certified cylindrical shaped HEPA filter, guaranteed 99.99% efficient at .3 microns. Commercial grade bottom mounted vacuum motor providing high CFM and waterlift for fast pickup. Low centre of gravity provides excellent stability. Non-marking rear tyres allow smooth, easy transport over floor obstructions.

S13 HEPA Dust Extractor Specification

Volts:	110/120	230/240
CFM:	129	129
HP:	1.7	1.7
Amps:	9.8	4.9
Water Lift:	100	100
Weight:	27kg	27kg

Product Code: S13069900



Dust Tool 4-5"
Dust Tool 7-9"



2 S26 HEPA Dust Extractor

S26 Features **H CLASS**

Jet Pulse for efficient cleaning without opening vacuum. Steel clamps secure vacuum during transport, corrosion resistant. 2" Hose inlet offset for maximum cyclonic separation of dust, maximizes airflow (CFM). Safety cap prevents material from escaping through inlet during transportation and storage. Lonogopac - 70ft long plastic tube can be separated into approximately 25 individual sealed bags for fast, safe handling and disposal of dust. Welded frame/platform with 3" swivel locking castors offer sturdy support and mobility even when the bag is full. Steel handle to ease mobility. East access and storage of wand and floor tool. Tested and certified cylindrical shaped HEPA filter, guaranteed 99.99% efficient at .3 microns. Commercial grade bottom mounted vacuum motor providing high CFM and waterlift for fast pickup. Low centre of gravity provides excellent stability. Non-marking rear tyres allow smooth, easy transport over floor obstructions.

S26 HEPA Dust Extractor Specification

Volts:	110/120	230/240
CFM:	258	258
HP:	3.4	3.4
Amps:	19.6	9.8
Water Lift:	100	100
Weight:	45kg	45kg

Product Code: S260131100



7-9" Dust Shroud

Product Code: 7-9" 201200010A



4-5" Dust Shroud
Product code: 4-5"
201300447A

3 W70P Wet & Dry Vacuum with Pump

Powerful wet cleaner with a 70 litre tank and evacuation pump. Emptying is carried out via a valve. The oil-cooled pump can handle concrete sludge, oils and cutting fluids. This machine is equipped with a coarse separation basket and wet suction bag. The combined filter/float system protects the motor. Pumping out can take place at the same time as suction. Equipped with a large bottom valve for simple cleaning. The wheels are of the 'non-marking' type, puncture-free and lockable at the front.



W70P Specification

Watts:	1260
Suction capacity (m³/h):	200
Pump (W):	650
Pump capacity (lit/min):	260
Filter/float:	yes/yes
Weight:	43kg
Dimensions:	L600 x W570 x H1250cm


Product Code: W70P110167555



PULLMAN ERMATOR HEPA AIR SCRUBBERS

1 Air Scrubbers

Erminator Air Scrubbers are truly unique. They are NOT designed using off-the-shelf components from the HVAC industry. They are constructed using specially designed components and materials. Both models include individually tested and certified HEPA filters.

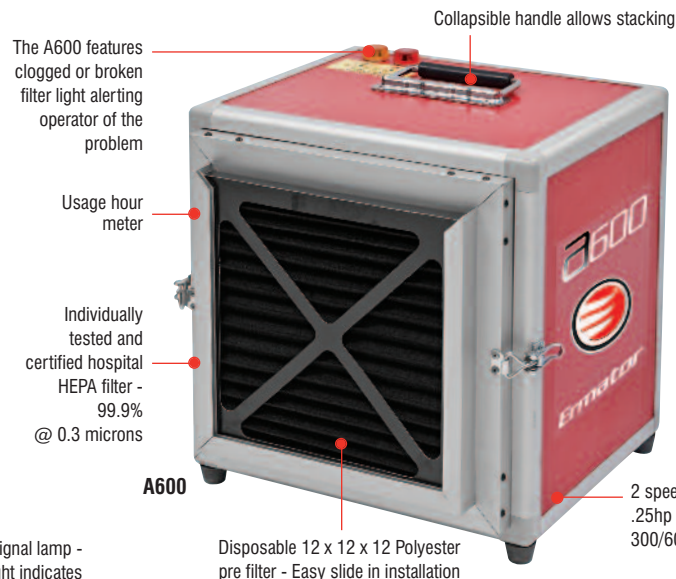

A600


Motor (HP): 0.38kw = 0.5HP
 Amps: 3.2
 Air Flow Settings: 2-speed, 350 & 600cfm
 Primary Filter: Disposable Polyester Media
 Secondary HEPA Filter: 99.99% efficient @ .3 microns
 Secondary HEPA Filter (ft2): 56
 Clogged Filter: Orange Indicator Light
 Leakage/broken HEPA Filter: Red Indicator Light
 Weight: 41lbs
 L x W x H: 15" x 17" x 17"

Product Code: A60059900

A1200

Motor (HP): 0.58kw = 0.5HP
 Amps: 4.8
 Air Flow Settings: 2-speed, 600 & 1200cfm
 Primary Filter: Disposable Polyester Media
 Secondary HEPA Filter: 99.99% efficient @ .3 microns
 Secondary HEPA Filter (ft2): 140
 Clogged Filter: Orange Indicator Light
 Leakage/broken HEPA Filter: Red Indicator Light
 Weight: 86lbs
 L x W x H: 16" x 28" x 28"

Product Code: A1200120600

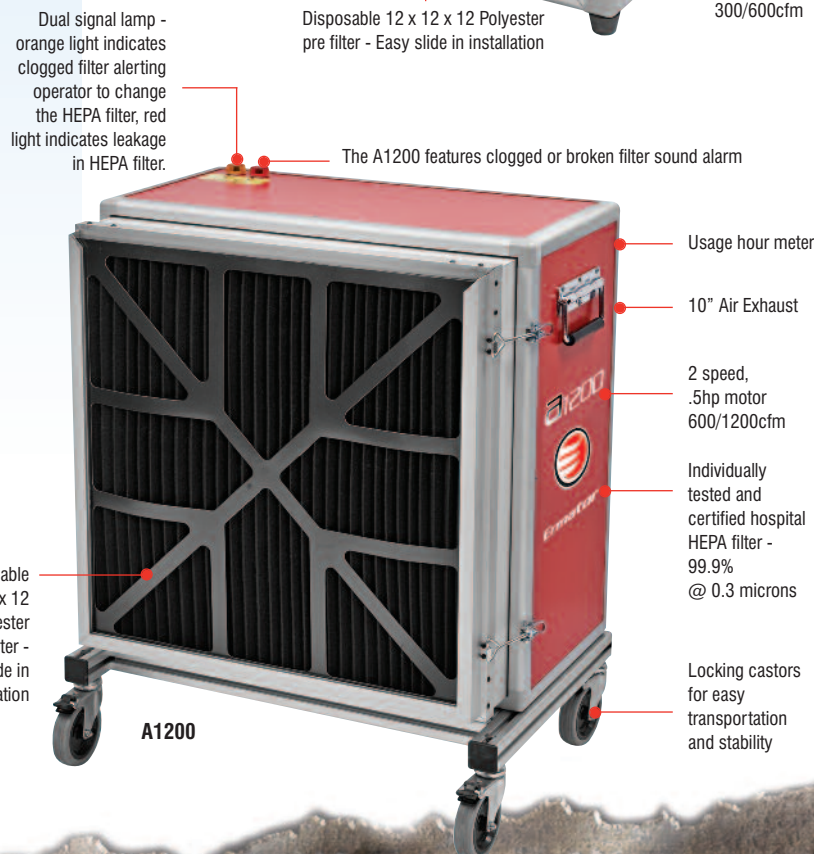


ELITE DUST SUPPRESSION RESERVOIR

2 Dust Suppression Water Reservoir

- Suppresses Dust During Cutting.
- Essential for on site.
- H&S compliance.
- Durable 14 litre Polyethylene Tank.
- 3m Reinforced Hose.
- Standard hose connection fits all popular saws.

Product Code: MGSDS02495

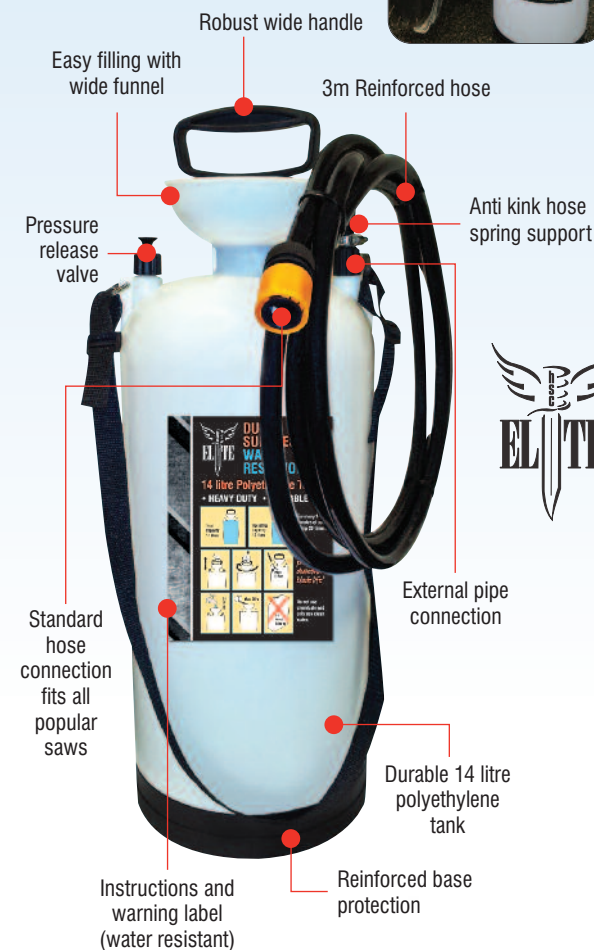

WET/DRY VACUUMS

1 Elite RVK60 Twin Motor Wet and Dry Vacuum Cleaner

L CLASS

High impact blown mould tank, twin motor with vacuum motor protection. Rear dump pipe for dispensing of sucked up water. Full set of tools for wet or dry work. 2 x 1000watt Motors.

Tank volume 60 litres.

Volume of airflow 106L/second.

Weight 30kg.

Dimensions:

H1090 x 440mm diameter.

Product Code:

115V RVK60115032900

240V RVK60240032900



Optional Dry Vac Bags available.
Product code RVKBAG0495

2 Elite RVK15 Wet Dry Vacuum Cleaner

L CLASS

High impact blown mould tank, single motor with vacuum motor protection.

Full set of tools for wet or dry work.

1 x 1000watt Motor.

Tank volume 15 litres.


Volume of airflow 48L/second.

Dimensions:

H550 x 345mm diameter.

Weight 30kg.

Product Code: 115V RVK1509900

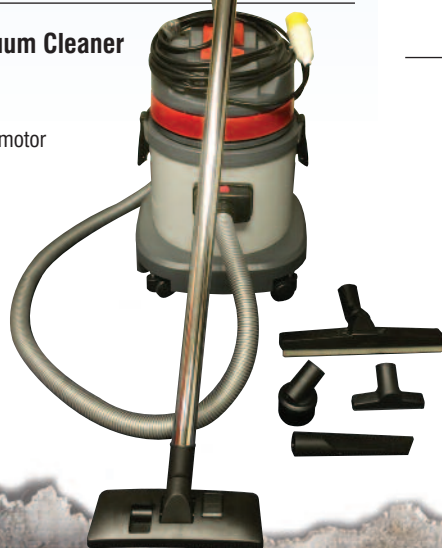

3 Hydromist Lite Carpet Cleaner

Easy fill and empty. Compact and manoeuvrable.

Simple two switch operation.

1100watt Vac motor. Voltage 230.

Solution Tank 6.5litres.

Recovery Tank 7litres.

Weight (Empty) 10kg.

Dimensions:

L530 x W370 x H430mm

Product Code: HL24023900

Supplied with upholstery attachment as standard.



4 Carpet Fresh

3 in 1 Carpet and Upholstery Shampoo.

A unique blend of carefully selected low foam surfactants that allows the deep clean of upholstery and carpets, leaving a non-stick dirt resistant finish. Supplied in 1litre containers in outers of 12.

Product Code: CF1L00199




DRAIN RODS

5 Drain Rod Sets

10 x 1 metre length rods. Brass universal joints - Carry case. Plunger, double worm screw and scraper.

Product Code: DRS02350

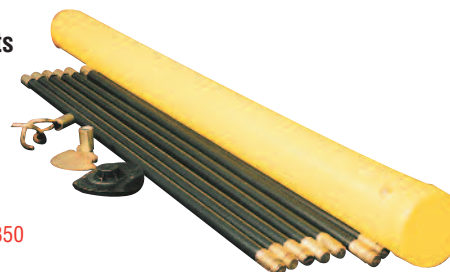

DECORATING



6 PROSTEAM Professional Wallpaper Stripper



Strong frame with hand grip. Mains cable and steam hose - both 5m long.

Neon on/off switch, two thermal

protection devices. Integral water level indicator.

Locking radiator cap with pressure safety lever.

7.5 litre pressure tested water tank. Dimensions: H305 x W480 x D270mm.

Weight 7.5kg. Product Code: 115V WPSLC17900 240V WPSLC17900

3 YEAR TANK WARRANTY

7 STEAMMASTER Professional Wallpaper Stripper

Step up allows you to safely reach ceilings and top of the walls. Spools to store the mains cable & steam hose both 5m long. Steam plate housing.

Aluminium frame for greater

protection. Neon on/off switch,

two thermal protection devices.

Integral water level indicator.

Locking radiator cap with pressure

safety lever. 7.5 litre pressure tested

water tank. Dimensions: H415 x W460 x D445mm.

Weight 9.5kg. Product Code:

115V WPS16900 240V WPS16900

3 YEAR TANK WARRANTY





FIRE EXTINGUISHERS & ACCESSORIES

1 9 LITRE WATER

- Kitemarked to BS EN3.
- Squeeze grip operation.
- Corrosion resistant finish.
- Internal polyethylene lining.
- Protective plastic base.
- Complete with bracket.

Product Code: 9903/003999



2 FOAM

- Kitemarked to BS EN3.
- Spray Nozzle.
- Squeeze grip operation.
- Corrosion resistant finish.
- Internal polyethylene lining.
- Protective plastic base*.
- Complete with bracket.
- Squeeze grip operation.
- 6ltr & 9ltr have passed the 35kv conductivity discharge test.



Product Code: 2 LT 9204/002499
Product Code: 6 LT 9205/006499
Product Code: 9 LT 9206/007999

* Excludes
2 Litre
model.



3 POWDER

- Kitemarked to BS EN3.
- Multi-purpose application.
- Squeeze grip operation.
- Corrosion resistant finish.
- Protective plastic base*.
- Complete with bracket.

Product Code: 1kg 9315/001799
Product Code: 2kg 81/02694002499
Product Code: 6kg 9310/006499
Product Code: 9kg 9311/007999
* Excludes 1 & 2kg model.



4 CO₂

- Kitemarked to BS EN3.
- Squeeze grip operation.
- Corrosion resistant finish.
- Harmless to machinery.
- Complete with bracket.



Product Code:
2kg 9705/006999
5kg 9706/0010999



5 Rotary Hand Alarm Bell

Rotary hand alarm bell.

Product Code: 42/520302999



6 Extinguisher Covers & Cabinets

Product Code:

20" x 11" Extinguisher cover 81/001071200
24" x 11" Extinguisher cover 81/001071500
28" x 12" Single cabinet 81/001071200
28" x 23" Double cabinet 81/001071500



7 Fire Blankets

All blankets comply with BS EN 1869:1997.

All blankets are BSI Kitemarked.

Product Code: 1.2mt x 1.2mt 81/023381999
Product Code: 1.2mt x 1.8mt 81/023442499



8 Fire Bucket

Plastic 2 gallon 'D' type bucket with lid Product Code: 3745/0101499
Wall mounting bracket Product Code: 3749/000695

9 Smoke & Carbon Monoxide Detector

Product Code: C02SM01599



10 Emergency Gas Alarm

To attract attention in an emergency situation. Ideal for temporary installations such as construction sites, exhibitions and events. 200ml canister.
Product Code: AIRH01272



11 Linkable Fire Alarm (Hit & Run)

Link up to 20 units using 2 core cable. Battery powered (9volt) with Battery test and low battery warning. Weather proof and compact design. D75 x H260 x W160mm. Noisy 100dB at 1 metre with high intensity LED Strobe light.
Product Code: SA108999



12 Mobile Fire Points (POA)

2 Fire extinguishers. 1 Fire Blanket. 1 Bucket & Bell.

*Available with or without Fire Extinguishers.

3 Fire Extinguisher (triple) Trolley also available.



13 ECO Fire Point Trolley (POA)

2 Fire extinguishers.
1 Fire Blanket.
1 Bucket & Hand Bell or Battery Alarm.

*Available with or without Fire Extinguishers.



Which Extinguisher to use

	Water	Foam	ABC Dry Powder	CO ₂ Gas	Wet Chemical
A		✓	✓		✓
B			✓	✓	
C			✓		
D METAL					
F			✓	✓	
F					✓

SIGNS ALSO AVAILABLE. Talk to us about your fire risk assessment

Extinguisher servicing at competitive prices

4 YEAR GUARANTEE

AWARD WINNING BARRETO

4 YEAR GUARANTEE



1 9 HP Hydraulic Rear Tine Tiller

Lockable pivot handle



Engine: Honda 9hp GX270
Length: 182cm (72")
Width: 58cm (23")
Height: 106cm (42")
Tine Width: 40cm (16")
Tine Diameter: 33cm (13")
Wheel Width: 53cm (21")
Weight: 190kgs

Product Code: 00A900359500

12 GOOD REASONS TO INVEST IN A BARRETO TILLER

Reliable

Hydraulic drive, no gear boxes or linkages to break.

Forgiving

No damage due to roots, rocks or other immovable objects - hydraulic relief valves absorb all shocks. Objects jammed in the tines? - simply reverse tines to remove.

Comfortable and easy to use

The weight and balance of the machine adds to the shock absorption qualities and aids stability and traction.

Low Maintenance and Repair Costs

Most moving parts are constantly being lubricated by hydraulic fluid.

Hard Ground Tilling

Separate hydraulic motors drive wheels and tines. Wheel speed is infinitely variable to allow slow forward motion with tines at full speed for hard conditions.

Tines

Lock out when wheels are in reverse.

Manoeuvrable

Hydraulics allow full forward - to reverse for ease of turning and rock removal.

Weight

and traction prevent tiller from running away in hard soil conditions.

BARRETO UK



Easy to use
Fingertip
Controls

Safety Clutch

Rugged Body
Construction of
3/16" Steel Plate,
Double Welded
Seams

11 Gauge
Steel Tine
Cover

Heavy Duty Tine Motor Guard

Hard Faced Tines


Heavy Duty Char Lynn Hydraulic
Motors Direct Mounting Eliminates
Belts, Chain or Gears

Heavy Duty
Engine Options

Tubular Steel
Engine Guard

Solid Steel Bumper

6.50 x 8 Tractor Tread Tyres

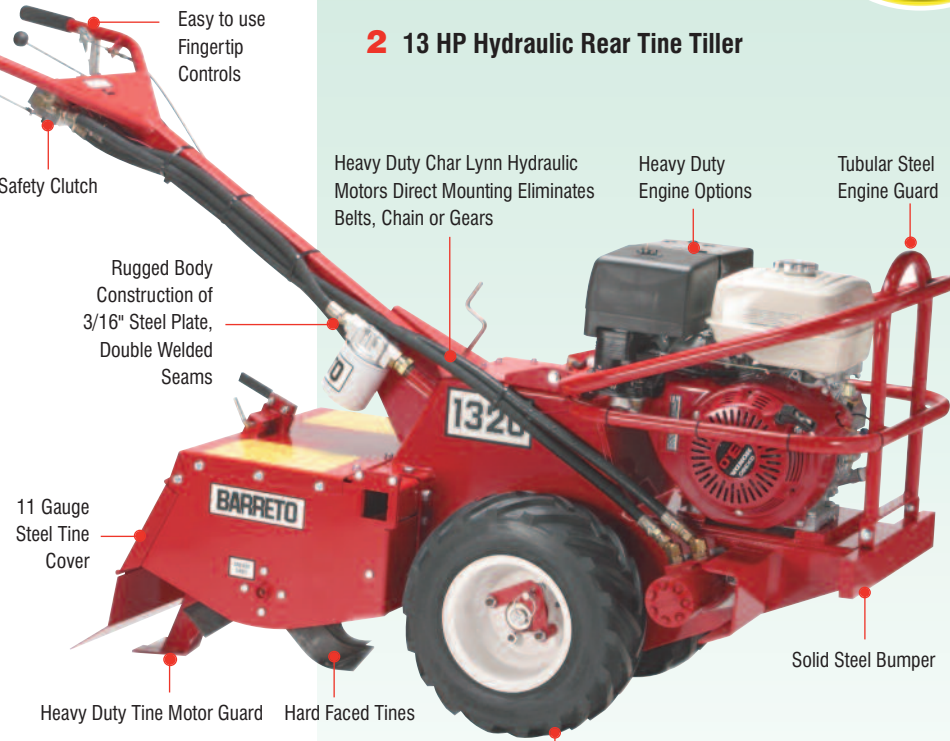

2 13 HP Hydraulic Rear Tine Tiller

Easy

to understand controls at the handle bars, no need to lean forward. Simple to operate.

Deadmans

clutch immediately shuts down all hydraulic power hence all moving parts.

Low Low Cost

Long life, low maintenance and good residuals make this the most cost effective tiller you can buy.

Profit

No more costly call outs, no down time, no more clutches to buy and very, very satisfied customers.

Engine: Honda 13hp GX390
Length: 200cm (78")
Width: 68cm (27")
Height: 112cm (44")
Tine Width: 56cm (22")
Tine Diameter: 37cm (14.5")
Wheel Width: 58cm (23")
Weight: 255kgs

Product Code: BAR1320459500



Hour meters now fitted as standard

ALL BARRETO PRODUCTS HAVE FOAM FILLED TYRES FITTED AS STANDARD - ELIMINATING PUNCTURES



For all your gardening
machinery spares and
consumables call
HSC Midland Power
on 01905 763027

Nationwide: 0845 309 0707 London: 0208 830 8333




BARRETO TRACK TRENCHER

1 Barreto 20hp Track Trencher - Steerable

The smallest dedicated tracked trencher on the market. Ideal for softer ground conditions the new tracked trencher has a larger ground contact area than conventional tyres. This gives lower ground pressure and greater traction.

As well as being steerable so you can easily dig those corner's and bends without having to reposition the machine. **Product Code: BAR2036TKH1149900**

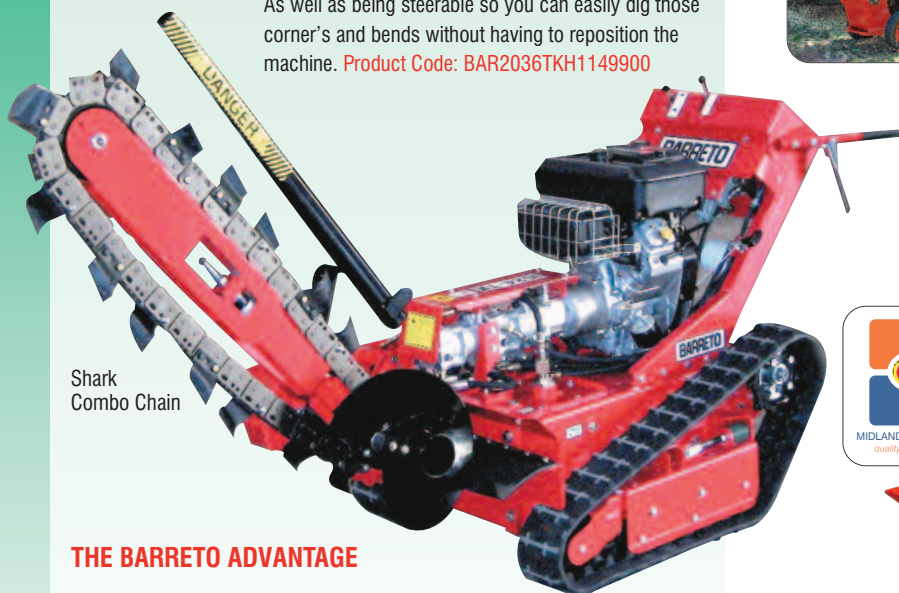

Shark
Combo Chain



THE BARRETO ADVANTAGE

- Direct** - Hydraulic drive to head shaft, no belts, no gears, no chains.
- Lower** centre of gravity.
- Outboard** support bearing as standard.
- Safety Clutch** - stops wheels and chain immediately. No Micro switches to fail. Engine continues to run. No need to reset controls and ground speed when resuming operation.
- Hydraulic** chain reverse to dislodge rocks or debris. Operator does not need to leave control position.
- Finer** degree of control for trenching ground speed. Ground speed controller lever to ground speed ratio: Forward: 1:1 Reverse: 2:1.
- The wheel drive** hydrostatic pump and digging chain gear pump are coupled together with easy access for maintenance or adjustment.



Honda: GX630
Length: 233cm (92")
Width: 83cm (33")
FWD speed: 190 ft/min
REV speed: 90 ft/min
Weight: 589kg
Trench depth: 24" - 30" - 36"
different available depths.
Trench width: 4", 6"



For all your gardening
machinery spares and
consumables call
HSC Midland Power
on 01905 763027



2 Chipper GTS1300

A powerful chipper for professional use. The mechanism is a drum on which 2 blades are mounted. Branches with a diameter up to 8.5cm are easily pulled in and chipped. 13hp Honda engine. **Product Code: CHGTM2495000**

Specification	GTS1300	GTS600
Engine:	Honda GX390	Honda GX160
Displacement:	390cc	160cc
Power:	13hp	5.5hp
Fuel:	Unleaded	Unleaded
Fuel tank capacity:	7 litres	3.6 litres
INPUT		
Input height:	100cm	180cm
Input dimensions:	34 x 42cm	25 x 25cm
OUTPUT		
Output height:	140cm	138cm
Output direction:	side	side
Deflector:	90° adjustable	90° adjustable
Emergency stop:	Yes	Yes
Wheel diameter:	40cm	20cm
Blades:	2/double sided	
Dimensions:	L150 x W152 x H75cm	L47 x W132 x H132cm
Weight:	146kg	65kg



3 Chipper GTS600

A powerful, petrol driven wood chipper specifically designed for the high demanding user. The GTS600 has a strong chassis, large wheels and a transport handle which makes this compact machine easily manoeuvrable through the smallest gates and into those hard to reach areas. Safety is paramount on this machine. Complying with EU CE certifications the opening of the hopper has rubber flaps to prevent any debris flying back out towards the user.

The GTS600 is derived from the professional line of wood chippers. Branches up to 5cm are easily pulled in and chipped by the mechanism, which is a drum with blades mounted to it. By putting a wheelbarrow under the high output with deflector, chips can easily be collected and re-used as bedding, walk paths in the garden or simply as kindling.

The GTM Professional GTS600 is suitable for all types of wood but can also be used to chip other, organic material like cocoa shells. Softer materials can be shredded as long as they are combined with harder materials. **Product Code: CHGTS600H89500**



DOSKO ROOT & STUMP GRINDER



1 6hp Dosko Stump Grinder



The Dosko Stump Grinder has been included in our range as part of our continual drive to find the best product for the hire industry.

Safety instructions are located in a weatherproof Manual Pack mounted on the handle bar and attached with a steel tether.

SPECIFICATIONS


Dosko 6hp Stump Grinder

Engine: Honda GX200
Cutting wheel Diameter: 10.1/2" /27cm
Number of Teeth: 3
Cutting Cap above ground: 10"/25cm
Cutting Cap below ground: 9"/23cm
Weight: 61kg
L142 x H114 x W58cm
Folded Length L92cm
Folded Height 59cm
Product Code: DOSK060229900



6hp machine fits into the boot of a small car.

B EASY CHANGE BLADES



Remove Nut B, slide the old blade out and replace with the new. No setting up as with the old finger and pocket type. The front mounted cutter wheel provides maximum operator safety at all times. Adjustable handlebars allow the operator a comfortable working position and complete control of the machine whilst grinding. Direct belt drive from the engine to the cutting wheel ensures there is no clutch to burn out. This stops the cutting wheel quicker as the engine acts as a brake.

Double bow handle bar construction allows the operator free unrestricted movement while grinding. Custom control panel provides easy access to controls at all times. Dosko stump grinders are equipped with an operator-presence shut down for additional safety.

Guide rollers have proven to play a key part in the stump grinders operating performance. Less belt tension is needed which reduces side load on the engine and cutter bearings. Belts run more smoothly during operation with less vibration and slipping, which dramatically increases the life of the belts.

The belts on the 13hp are three-grooved power band, which are rated up to 60hp. Machines belts will not burn out easily.

2 13hp Dosko Stump Grinder



SPECIFICATIONS

Dosko 13hp Stump Grinder

Engine: Honda GX390.
Cutting Wheel Diameter: 14"/36cm
Number of teeth: 8
Cutting capacity above ground: 60cm
Cutting capacity below ground: 40cm
Handle positions: 6
Weight: 136kg.
L149 x H130 x W77cm
Product Code: DOSK0130352900



For all your gardening machinery spares and consumables call
HSC Midland Power
on 01905 763027

1 Benassi Turf Cutter TC30

The big advantage of this machine over its competition is you can drive the wheels separate to the blades. Weighing over 70kg you can drive the wheels independently from the blade which also makes this machine safer when working and having 2 speeds means you can get the job done quicker.

Specification

Engine: Honda GX160
Working Width: 30cm
Cutting Height: Adjustable up to 35mm (6 positions)
Gearbox: 2 forward speeds
Transmission: Mechanical Gearbox
Gears: Oil Bath
Starter: Recoil
Weight: 73kg
Dimensions: L90cm x W40cm x H110cm
Product code: BENASITC30149500



3 Benassi Leaf Vacuum AF100

Being made of ABS material, the AF100 is easy to push and great for maneuvering around tight spots. Competitively priced so guarantees a good return on investment.

Specification

Engine: Honda GCV160 4.8hp
Transmission: Push
Start: Manual
Body: ABS
Bag Capacity: 230 litres
Accessories: 3 metre Suction Hose
Weight: 33kg
Product Code: BENASSIAF10054500



2 Benassi Blower Vacuum AF200

The AF200 is a heavy duty leaf blower, the body and impellor is made of steel. Extra wheels fitted under the 250 litre collection bag keeps the machine manoeuvrable when the bag is full. This machine can be converted into a blower in a matter of minutes.

Specification

Engine: Honda GX160
Transmission: Power Drive
Start: Manual
Body: Sheet Steel
Bag Capacity: 250 litre
Accessories: 3 metre Suction Hose
Weight: 54kg
Product Code: BENASSIAF200115000



BENASSI CULTIVATOR

1 Benassi BL300 Cultivator

This new improved heavy duty cultivator has been modified to suite the hire shop market. If you need a unit that can be collected and easily loaded into the back of a car. The Benassi BL300 does this and it also has the advantage of the handle bars folding down to the ground so making it stable and less likely to tip over. No need to remove parts to make adjustments, so no parts to loose. The Benassi BL 300 has a screw to hold handle bar adjustment and a pull and lift front wheel, so making it an ideal hire product.



- Honda GX160 Engine.
- Grease filled Gearbox.
- Tillar Width 600mm.
- Pull and lift front wheel.
- Folding handle bars.
- Chain driven transmission.
- 1 Forward speed.
- Weight 51Kg.

Product Code: BL300H49500



BENASSI ROTOVATOR

Benassi S.p.A. is a leader in the production, construction and design of small mechanization equipment for agriculture and gardening. Thanks to its many years of market presence, experience and the trust of over 1500 dealers, Benassi offers Europe and the World a wide range of products for soil hoeing, field scything and grass mowing.

2 Benassi C2300 Reverso Rotovator

This 6hp rotavator is compact and robust. Having tines that dig in reverse, enable it to punch above its weight. When the machine is digging harder ground, the tines dig into the ground, rather than running off on the tines, as a forward motion tined machine would. So making it easy and safer to use.

- Honda GX160 Engine.
- Transmission gears in oil bath.
- Gears 1 Forward, 1 reverse.
- Adjustable handle bars.
- 480m working width.
- Max depth 150mm.
- Weight 78Kg.
- Compact and robust.
- Reverse digging tines.
- Easy to use.

Product Code:
MC2300H109500



BENASSI MOWER

3 Benassi Extreme Mower FT155

- Honda GCV160 Engine.
- Belt and gear transmission.
- 1 Forward speed.
- Adjustable handle bars.
- Smaller than a flail mower.
- Ideal for long grass and bramble.
- Cutting height 4cm to 10cm.
- 55cm working width.
- Weight 68Kg.

Product Code: FT1550109500



For all your gardening machinery spares and consumables call
HSC Midland Power
on 01905 763027

1 Benassi Professional Flail Mower T502

Ideal for cutting brush, scrub grass etc. Narrow enough to go through single gates, independent brakes on each driven wheel to assist with steering.

Specification

Engine: Honda GX160 5.5Hp
Transmission: Belt & Gears
Handle Bar: Fully Adjustable
Speeds: Single Forward
Blades: 24 on a Flail Shaft
Width: 58cm
Cutting Width: 50cm
Weight: 99kg

Product Code:
BENASSIT502249500



2 Benassi Extreme Plus Mower T532

Powered by a Honda GX200 this is a real robust contractors tool. Features: Floating deck, so can be used on an incline. Swing back blade. Belt drive to blade protecting the engine crank. Adjustable handle.

Specification

Engine: Honda GX200
Filter: Oil bath
Working width: 52cm
Speed Km/h: 1.5, 2.5, 3.7 reverse 1.5
Gears: 3 forward, 1 reverse
Weight: 132 KG

Product Code:
BENASSIT532 (P.O.A.)



3 Benassi Large Professional Flail Mower T870

Professional Contractors pedestrian flail mower. This heavy duty flail will quickly make light work of whatever vegetation is put before it. Independent brakes on each driven wheel to assist with steering.

Specification

Engine: Honda GX390 13Hp
Transmission: Belt & Gears
Handle Bar: Adjustable Height
Cutting Width: 87cm
Gears: 4 forward, 2 reverse
Speeds: km/h Forward 1.36/2.24/2.8/4.7
Reverse 1.36/2.8
Blades: 48 on a Flail Shaft
Weight: 187kg

Product Code:
BENASSIT870450000



4 Benassi Scarifier/Dethatcher A160

- Honda GX160 Engine.
- Transmission belt drive.
- Cutting systems:
4 rotors, 48 swinging 3mm blades.
- Adjustable handle bars.
- 480m working width.
- Max depth 150mm.
- Weight 74Kg.
- Compact and robust.
- Bag capacity 50litre.
- Easy to use.

Product Code: BENASSIA160119500



For all your gardening
machinery spares and
consumables call
HSC Midland Power
on 01905 763027

EFCO CULTIVATOR

1 EfcO Cultivator

Engine: Honda GX160
Power: 5.5hp kW4
Gearbox: 1 forward gear
Rotor: 2+2 blades -55cm
with protection discs
Product Code: MZ209059900



Image shown has extended safety plates and additional tines. Product supplied has only two sets of tines and standard length safety plates.

The EfcO cultivator is built for the hire industry.

A professional model for cultivation duties and general landscape maintenance.

Maximum reliability thanks to a chain transmission guaranteed for three years.

Equipped with fully adjustable handlebars for maximum versatility of use, even operating close to plants and crops.



For all your gardening machinery spares and consumables call
HSC Midland Power
on 01905 763027

EFCO SCARIFIER

2 EfcO Scarifier

Lawn scarifier of rugged construction equipped with powerful engines, designed to ensure even the most stubborn of soils can be tackled with complete confidence. Regular aerating and mowing will ensure lawns stay lush, green and healthy. Tough spikes of hardened steel (floating, on 50 H60 model), effective even on the hardest soils and the deepest depressions. Height adjustment system with memory: ensures the machine can be set down at the same height when repositioned. Powerful and reliable Honda engine of overhead valve design, ensuring steady work rate and maximum power transmission: an equipment package guaranteed to remove weeds, moss and other residual matter impeding efficient aeration of the soil. Smooth progress on surfaces of any kind, assured by the user optimum control over the machine, whatever the operating conditions.

Deck: Steel
Displacement: 160 cm³
Engine make/model: Honda GX160
Cutting width: 40 cm
Wheels: Plastic with bearings
Weight: 49 Kg

Product Code: AG40R45062500



3 LR48PK

Push-Type Lawnmower with Steel Deck. These machines have ball-bearing wheels for smoother operation. The cutting height is independent and adjustable on each wheel in 4 positions. A large 60-litre collection bag allows cutting for longer periods before emptying the load.

Deck: Steel
Power: 4.0hp
Engine make/model: Loncin
Cutting width: 46cm
Propulsion: Push
Cutting adjustment: Independent
Cutting height: 28 to 75mm
Grass box capacity: 60 litres
Weight: 26.1kg

Product Code: ELR48PK23500

4 LR48TH - Comfort (Mulching Mower)

Self-Propelled Lawnmower with Steel Deck, these mechanically driven models are the right choice for larger areas and for rough, inaccessible or gently-sloping ground. A lever allows adjustment of centrally-controlled cutting height to suit specific requirements.



Deck: Steel
Displacement: 160 cm³
Engine make/model: Honda GX160
Cutting width: 50 cm
Wheels: Metal with bearings
Weight: 65 Kg

Product Code: AG50H6079900



Deck: Steel
Power: 4.5hp
Engine make/model: Honda GCV 135
Cutting width: 46cm
Propulsion: Self-Propelled
Cutting adjustment: Central
Cutting height: 28 to 75mm
Grass box capacity: 60 litres
Weight: 31.3kg

Product Code: ELR48TH36900



EFCO MOWERS

1 LR53THX - Comfort

Deck:	Steel
Power:	5.5hp
Engine make/model:	Honda GCV 160-A2
Propulsion:	Self-Propelled
Cutting width:	51cm
Cutting adjustment:	Central
Cutting height:	25 to 65mm
Grass box capacity:	60 litres
Weight:	36.9kg

Product Code: ELR53THX44900



Lawnmower with Steel Deck. Rugged machine with a steel deck for areas of up to 2000 square metres; great attention has been paid to facilitating the operators task, from the central cutting-height adjuster to ball-bearing wheels for smoother running even on rough ground. A large 60-litre collection bag allows cutting for longer periods before emptying the load.

2 LR53PH

Deck:	Steel
Power:	5.5hp
Engine make:	Honda
Propulsion:	Push
Cutting width:	51cm
Cutting adjustment:	Central
Cutting height:	25 to 65mm
Grass box capacity:	60 litres
Weight:	36.9kg

Product Code: LR53PH28900



Lawnmower with Steel Deck. Rugged machine with a steel deck for areas of up to 2000 square metres; great attention has been paid to facilitating the operators task, from the central cutting-height adjuster to ball-bearing wheels for smoother running even on rough ground. A large 60-litre collection bag allows cutting for longer periods before emptying the load.

EFCO HEDGETRIMMERS & CHAINSAWS

3 24" Double Sided Hedge Trimmer ETG2650XP

With the machine set at idle, on the double blade version, the handle can rotate by 180° (90° in a clockwise direction and 90° in an anti-clockwise direction) enabling the operator to also work easily on the sides of hedges. Emak 26cc 2- stroke engine, 1.2hp. Blade stops in less than one second. Primer for easy starting.

Product Code:
ETG2650XP29900



4 14" & 16" Universal Chain Saws

Versatile domestic machines (lopping, light-pruning, small-medium diameter cutting), designed to offer the best in terms of user friendliness. Thanks to the high engine torque (that will not slow down under even the most critical of conditions), these chain saws boast an exceptional cutting speed. The excellent weight/power ratio and practical one-piece handle/grip section ensure maximum user-friendliness whilst aiding cutting accuracy.

MT3700 (14")

Power/displacement:	2.2hp - 36cc - 2-stroke
Bar length:	35 cm/14"
Chain (pitch & gauge):	3/8" x .050"
Oil pump:	automatic
Oil/fuel tank capacity:	0.22 L/0.32 litres
Weight:	4.1kg

Product Code: EMT370019900

MT4100S (16")

Power/displacement:	2.4hp - 40cc - 2-stroke
Bar length:	41 cm/16"
Chain (pitch & gauge):	3/8" x .050"
Oil pump:	automatic
Oil/fuel tank capacity:	0.22 L/0.40 litres
Weight:	4.1kg

Product Code: EMT4100S23900



For all your gardening machinery spares and consumables call
HSC Midland Power
on 01905 763027

EFCO STRIMMER

1 Stark 2500T (2 Stroke)

These light and easy-to-handle machines are able to keep vibrations to a minimum as they are fitted with self-lubricating bushings on the transmission shaft, whilst the engine and grip have been kept separate. Comes complete with linehead and metal cutting blade. Euro 2 Engine.

Power/displacement: 1.0hp - 26cc
Tube diameter: 26mm
Grip: twin
Clutch: yes
Fuel tank capacity: 0.75 litres
Weight: 6.2kg

Product Code:
ESTARK2500T19900



Euro 2 Engine



EFCO BLOWERS

2 Stroke Hand-Held Blower-Vacuum

Ideal tool for tidying up garden leaves, clippings and other debris. The "Primer" and "Lift Starter" systems ensure quick and simple starting at all times. The practical throttle lock allows air-flow to be adjusted directly from the handle in order to suit the work being carried out. A special kit (ESA3000KIT) allows quick and easy conversion to a vacuum. The suction fan is fitted with a steel mulching blade in order to shred the material collected and lessen its volume inside the bag.

Power/displacement: 1.2hp - 26cc
Max. Air Volume: 700m³/h
Max. Air Speed: 74m/sec
Collection Bag Cap: 36 litres
Weight: 4.3kg

Product Code: ESA300025500

3 Weedwakka

The Multicut Weedwakka cuts cleaner and is ideal for general cutting as well as edging around trees, concrete and fences. The Weedwakka is designed for use with the straight shafted brushcutter only. Product Code: WW0202495

Benefits of using the Weedwakka

- No cord needed.
- No Adjusting.
- No Tangles.
- Blades are replaceable in seconds.
- No Tools required.

Spare Weedwakka Blades Product Code: WW020601195



Pack of six.



4 Powerlube

Powerlube brand, Semi-synthetic, Super 2-stroke oil in 100ml (boxes of 25).

Product Code: PL100-2502225



5 Knapsack Sprayers

Knapsack sprayer with blown HD polyethylene UV stabilised tank - 16 litre capacity. Ambidextrous use. Plastic piston resistant up to 7 atm, Plastic lance and plastic nozzle spray gun.

Product Code: MGS1602995



6 Pressure Sprayer

Blown HD polyethylene UV stabilised tank. 5 litre capacity. 3.5 atm safety valve. Plastic pump with neoprene seals. Plastic lance and plastic nozzle spray gun.

Product Code: MGS701395



7 Trolley Sprayer

Tank Capacity 16 litre. Working pressure 3 bar. Discharge max 0.35 l/m. Number of nozzles 1. Material Plastic. Dimensions: 37cm x 39cm x 90cm. Weight: 5 kg.

Product Code: MGS16T03495



8 Garden Roller

Heavy Duty Steel Roller. Roller Size: 50cm x 40cm diameter. Sand or Water Fill. Wet Sand: 120 kilos. Water: 72 kilos. Empty: 13 kilos.

Product Code: GR06900



For all your gardening machinery spares and consumables call
HSC Midland Power
on 01905 763027



COMPAC HYDRAULIC & EFCO POST HOLE BORERS

1 Compac Hydraulic Post Hole Borer

Features

One man operation. Reversible. Easy to set up and use. Engine balances the auger. Relief valve stall protection. Unit extends and retracts for ease of transport and storage. Large wheels. Auger locks in position. Auger adaptor as standard. Hydraulic power. No belts, chains or gearboxes to break. Safe to use as the relief valve cuts in when hitting an immovable object, rather than spinning the operator around. Auger reverse enables the operator to screw the auger out of clay or from under tree roots or cables rather than having to turn the whole machine or manually dig out the auger in a confined space.

Specification

Retracted: H1270mm x L1750mm x D750mm.
Weight 100kg.



9hp Honda engine

Augers are compatible with two man Stihl machines

Compatible with Stihl augers.

100mm (4") x 1m length auger

Product Code BAR4A014100

150mm (6") x 1m length auger

Product Code BAR6A017600

225mm (9") x 1m length auger

Product Code BAR9A022500

300mm (12") x 1m length auger

Product Code BAR12A024800

350mm (14") x 1m length auger

Product Code BAR14A033750

Pilot worm screw (All sizes)

Product code BARSP3502843

Starter Auger Teeth (All sizes)

Product code AUGT0599



Benefits

Cuts labour costs. Less tiring to use. Easy to get out of hole. Reduces strain on user. Transports easily. Moving round sites is easy. Moving from hole to hole is easier. Compatible with most augers. Low maintenance and repair.

Product Code: PHB339999

3 YEAR GUARANTEE




For all your gardening machinery spares and consumables call
HSC Midland Power
on 01905 763027

2 EfcO Two Man Earthborer

The new EfcO ETR1585R is designed for professional use and benefits from a power rating of 5.7hp/4.2kW.

It is intended for large hole diameters and stubborn soils, and therefore requires two or more operators for reasons of safety. It has a strengthened tubular steel structure, making it suitable even for the toughest of operating conditions. Folding handles make it easy for transporting and a safety switch shuts off the engine automatically in hazard situations. It also has a reversible drive to assist withdrawal of the bit from the soil.

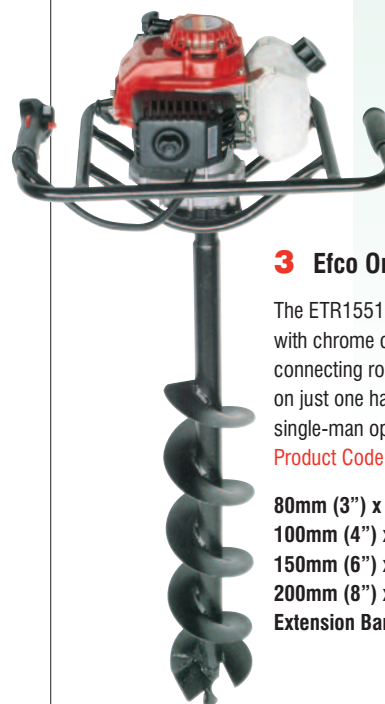

Engine 80.7cc. Power 5.7hp.
Reduction Rate 85:1.
Bit Diameter from 8cm - 50cm
(augers over 35cm require an additional locking collar)

Weight 30.6kg.

Product Code: ETR15850154900

250mm (10") x 1m length auger

Product Code: EA10027500

300mm (12") x 1m length auger

Product Code: EA12029900

Extension Bar 38cm

Product Code: ETR1585EB07995

3 EfcO One Man Earthborer

The ETR1551 mounts an Emak 2-stroke 40cc engine with chrome cylinder and forged-steel drive shaft and connecting rod. The engine controls are grouped together on just one hand making them the ideal solution for single-man operations.

Product Code: ETR1551039900

80mm (3") x 1m length auger

Product Code EA306927

100mm (4") x 1m length auger

Product Code EA407123

150mm (6") x 1m length auger

Product Code EA607451

200mm (8") x 1m length auger

Product Code EA807778

Extension Bar 30cm Product Code ETR1540EB06594



CONVEYOR BELTS

1 Mini-Max Conveyor Belts

The updated Mini-Maxi conveyor belts are excellent hire equipment. Mini-maxi conveyors are ideal for landscape gardeners, renovation firms and development or demolition contractors.

The Mini-Maxi conveyors are designed and built by Etramo in Belgium, exclusively for the hire industry. They listened to their Hire customers and took in to account their needs as well as the end users needs.

Safety is a priority at Etramo. Each conveyor belt is equipped with 2 emergency stop buttons, one on each side of the conveyor belt. One push on any emergency stop on any conveyor belt that is part of the series will halt all of the conveyor belts in the series circuit. This unique safety switch action means the Etramo Mini-Maxi is one of the safest, if not the safest, conveyor belt in the market.

Mini
L x W x H 313 (343 with handles) x 49 x 34cm
Weight: 100kg
Belt width: 40cm
Belt speed: 24m/min
Motor: 0.37Kw - 230 or 110v (1/2hp)
Max rising angle: 40°
Capacity: 50 tonnes/hour

Maxi
L x W x H 448 (478 with handles) x 49 x 34cm
Weight: 135kg
Belt width: 40cm
Belt speed: 24m/min
Motor: 0.50Kw - 230 or 110v
Max rising angle: 40°
Capacity: 50 tonnes/hour

Large Hopper
Small Hopper
Support for Conveyor Belts
Set of wheels
Link Cord

Product Code: LH0081019900
Product Code: SH0085613900
Product Code: 008605900
Product Code: 008625900
Product Code: 018145900

A larger hopper permits loading with a mini excavator and reduces material spillage. The smaller handy hoppers ensure that material is moved from conveyor to conveyor with virtually no spillage.


Each Conveyor has a hot-galvanized steel frame, vulcanised rubber belt, steel belt scraper and Harting couplings. Large 40cm belt width. Stackable making them easy to store.



The movable supports allow you to place each conveyor belt exactly above the next one.

A simple belt scraper keeps the belt clean.

Openings are provided for assembly with scaffolding pipes and the belt can be easily adjusted.

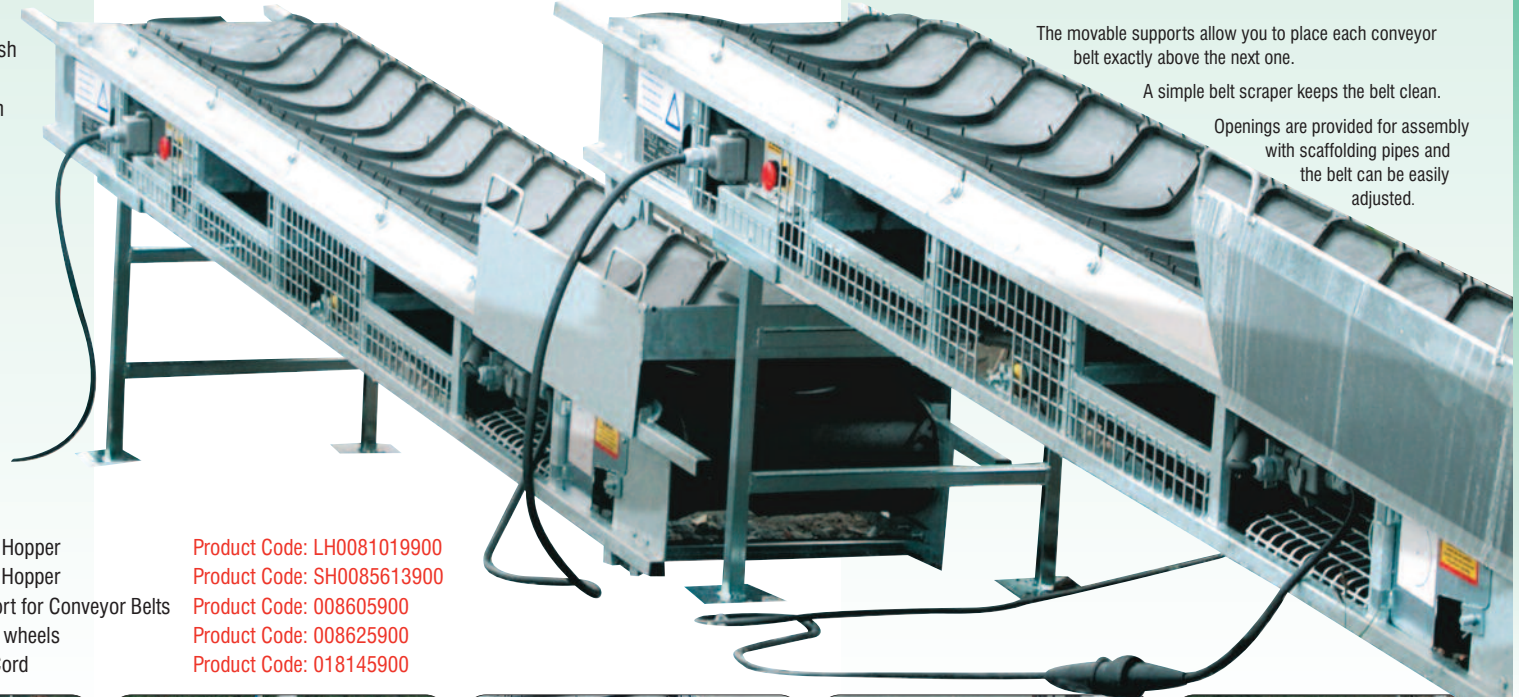

For all your gardening machinery spares and consumables call
HSC Midland Power
on 01905 763027

Nationwide: 0845 309 0707 London: 0208 830 8333



1 LEVPANO® II



Plasterboard panel held safe and secure by the telescopic arms. Adjustable head and arms for fixing plasterboard panels under pitches. Quick assembly and dismantling. Maximum length of board 3m. Maximum horizontal lift 3.5m. (4m with 0.5m extension). Horizontal and angled lifts. Max load 75kg.

Product Code: LEVP2049900

Free demonstration disc, trade counter leaflets and posters supplied with every machine

* Patented Safety System with dual cables.



LEVANO® BOARDLIFTERS

2 LEVPANO COMBI®

The lifting device that allows you to fix plasterboard panels in any position: HORIZONTALLY - VERTICALLY and under pitched ceilings. Maximum length of board 3m. Maximum horizontal lift 3.6m. (4m with 0.4m extension) Maximum vertical lift 5m. (5.4m with 0.4m extension). Max load 80kg.

Product Code: LEVPC069900



MONDELIN
ROGER
innovating and manufacturing

Free demonstration disc, trade counter leaflets and posters supplied with every machine

* Patented Safety System with dual cables.

HANDLING EQUIPMENT

1 E2500 2.5 Tonne Pallet Truck



FOR USE IN BUSY WAREHOUSES
AND ON FLAT SMOOTH SURFACES.
Simple and easy to use.
Robust and reliable.
2500kg capacity.
Min height of lift 80mm.
Max height of lift 190mm.
Length of forks 1150mm.
Width of forks 540mm.
Distance between forks 230mm.
Weight 70kg.
Steer wheel: Nylon.
Roller wheels: Nylon.

Product Code: E2500PT18900




1 YEAR WARRANTY



2 Beam-Lifter

Simpler and more robust than all of
it's competitors. Capable of lifting
600kg to a height of 3 metres.
No cable or guides on the Beam-Lifter.
Screw mechanism allows similar
operation to an acrow prop.
Will fit into the back of most estate cars.
Folds down to only 28" high giving
access to the most narrow of doors.
Stacks up to five high saving valuable
space.

Product Code: BL0089500

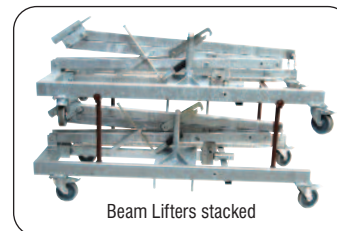

Beam Lifters stacked



MISCELLANEOUS

3 Folding Gas Storage Cage

Folds flat for easy transportation
or for storage when not in use.
Quick and easily assembled, made
from 50 x 50mm 10 gauge welded
mesh. Durable powder coated finish,
with padlock able double door.
Base shelf keeps products off the floor.
2 internal shelves 735 x 750mm.
Weight 130kg.

Cage dimensions:
H1700 x W1735 x D830mm

Product Code: GC44500



4 Concrete Dissolver

THE ALTERNATIVE TO ACID

- No Phosphoric Acid.
- Non Corrosive.
- Non Hazardous to equipment.
- No Hydrochloric Acid.
- Non fuming.
- 100% Biodegradable.

For use on: Mixers, Trowels,
Screeds, Saws, Pumps, Cement
Trucks, Patios, Wooden Decks,
Vehicles and much more!

1 x 5ltr container Product Code: GC5L03500

1 x 20ltr Drum Product Code: GC20L12900



5 Line Marker Spray Paint

- Suitable for use on asphalt,
concrete, gravel and grass.
- Dries in 30 minutes -
fully cured in 24 hours.
- Improved Formulation.
- Brighter Colours.
- Better Application.
- Cleaner Lines.
- Better Durability.
- Higher Viscosity Paint.
- Supplied in cases of 12 x 750ml.
- Colours available: Yellow, White, Red, Green, Blue, Black & Orange.

Product Code: LMSP0199



THE HIRE SUPPLY COMPANY (UK) LTD.

Nationwide: 0845 309 0707 FREE Fax: 0845 309 0708 • London: 0208 830 8333 Fax: 0208 830 8500



HSC HEAD OFFICE

Building No. 2, Sheet Stores Industrial Estate, Off Fields Farm Road, Long Eaton, Nottingham NG10 1AU • E-mail: sales@hscuk.co.uk • www.hscuk.co.uk

HSC LONDON

Unit 4, Atlas Business Centre, Oxgate Lane, Staples Corner, London NW2 7HJ

MIDLAND POWER DISTRIBUTORS UK LTD

Farrell House, Orchard Street, Worcester WR5 3DW • Tel: 01905 763027 • Fax: 0800 590866 • Email: sales@midlandpower.co.uk • Web: www.midlandpower.co.uk

Notice. Our product range is expanding at all times. If your requirement is not featured in this catalogue please contact our sales staff, we may stock it. All pictures are for illustration purposes only, products supplied may be different in appearance to products shown. Measurements are approximate. E&OE. All prices exclude carriage and VAT. All prices are correct at time of printing but are subject to change.

